

## 0.1mA Termination, 0.045uA Battery Leakage Current Single Cell Li-ion Battery Charger

### GENERAL DESCRIPTION

The PW4556 series of devices are highly integrated Li-Ion and Li-Pol linear chargers targeted at small capacity battery for portable applications. It is a complete constant-current/ constant voltage linear charger. No external sense resistor is needed, and no blocking diode is required due to the internal MOSFET architecture. It can deliver up to 300mA of charge current (using a good thermal PCB layout) with a final float voltage accuracy of  $\pm 1\%$ . The charge voltage is fixed at 4.2V or 4.35V, and the charge current can be programmed externally with a single resistor. The charger function has high accuracy current and voltage regulation loops and charge termination.

The PW4556 automatically terminates the charge cycle when the charge current drops to 1/10 the programmed value after the final float voltage is reached. When the input supply (wall adapter or USB supply) is removed, the PW4556 will shut off, only 40nA leakage current coming from battery at sleep mode when ambient temperature is 85°C, so it can save energy and improve standby time.

The PW4556 is available in a small package with TDFN1X1-6L. Standard product is Pb-Free and Halogenfree.

### FEATURES


- 1% Charge Voltage Accuracy
- 5% Charge Current Accuracy
- Support Application for Very Low Charge Currents –1mA to 300mA
- Support minimum 0.1mA Charge Termination Current
- 0.045uA Maximum Battery Output Leakage Current @ 0°C~85°C
- High Voltage Chemistry Support: up to 4.35V
- Output Short-Circuit Protection
- Soft-Start Limits Inrush Current
- Charge Status Output Pin
- Automatic Recharge

### APPLICATIONS

- Fitness Accessories
- Smart Watches
- Bluetooth Handsets
- Wireless Low-Power Handheld Devices




### Selection Guide

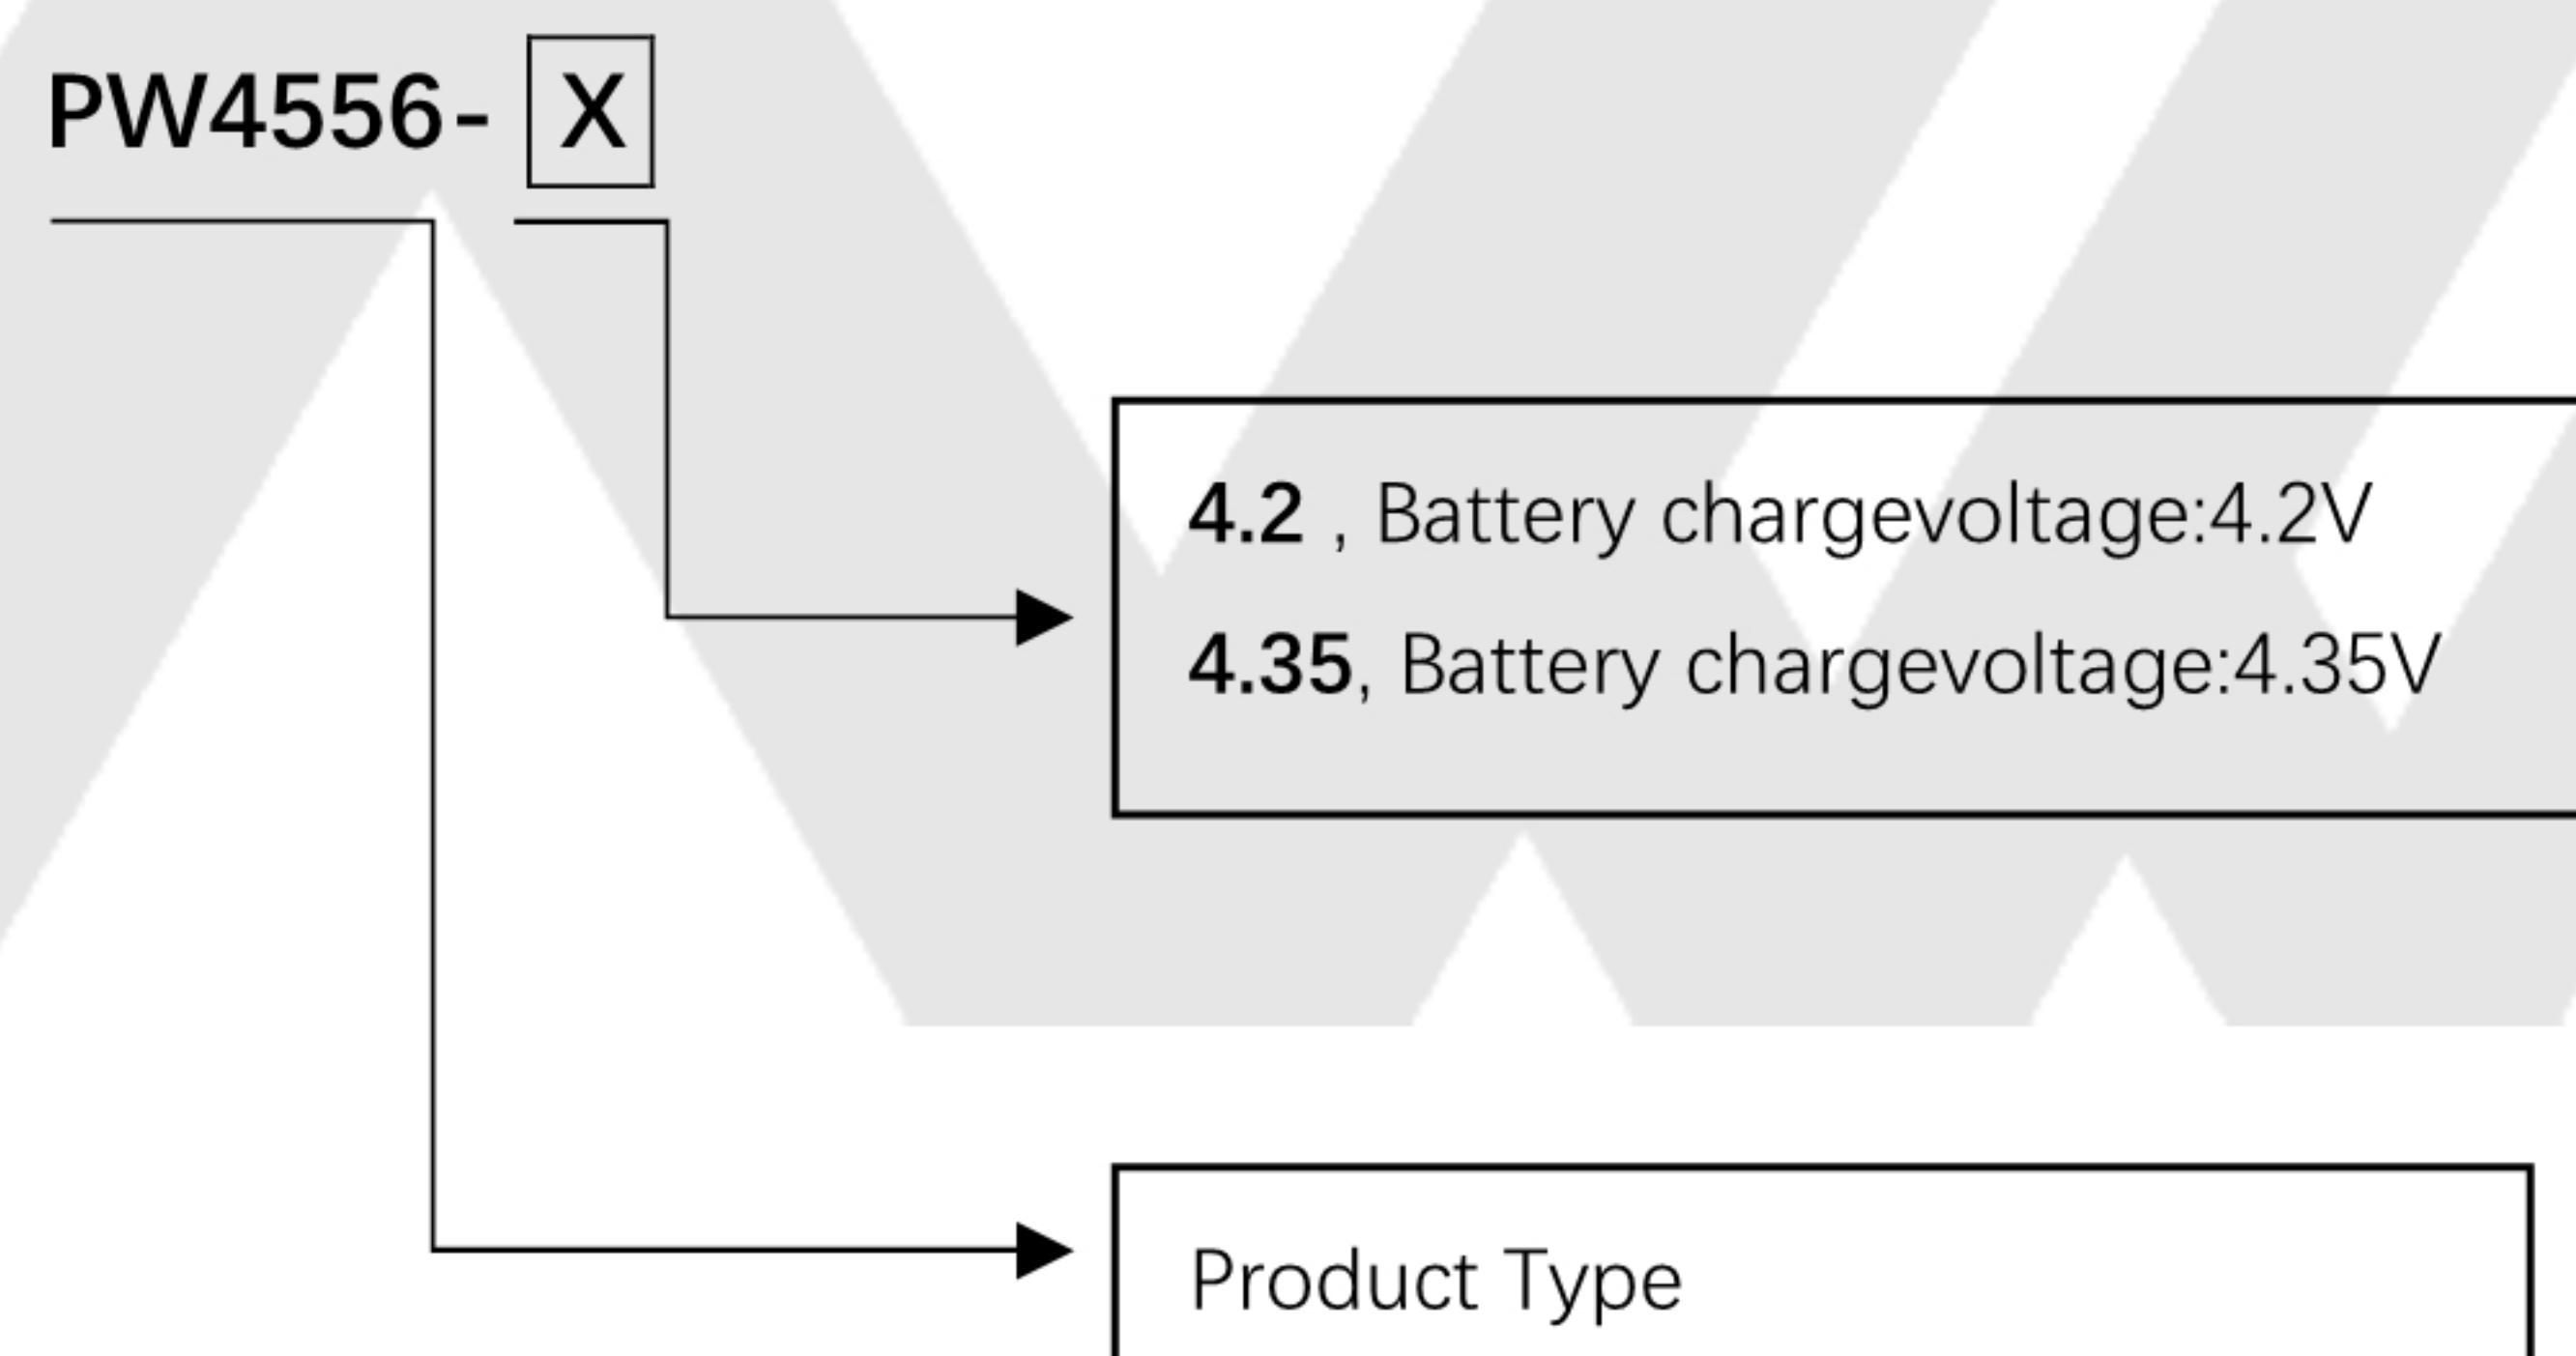




## TYPICAL APPLICATION CIRCUIT

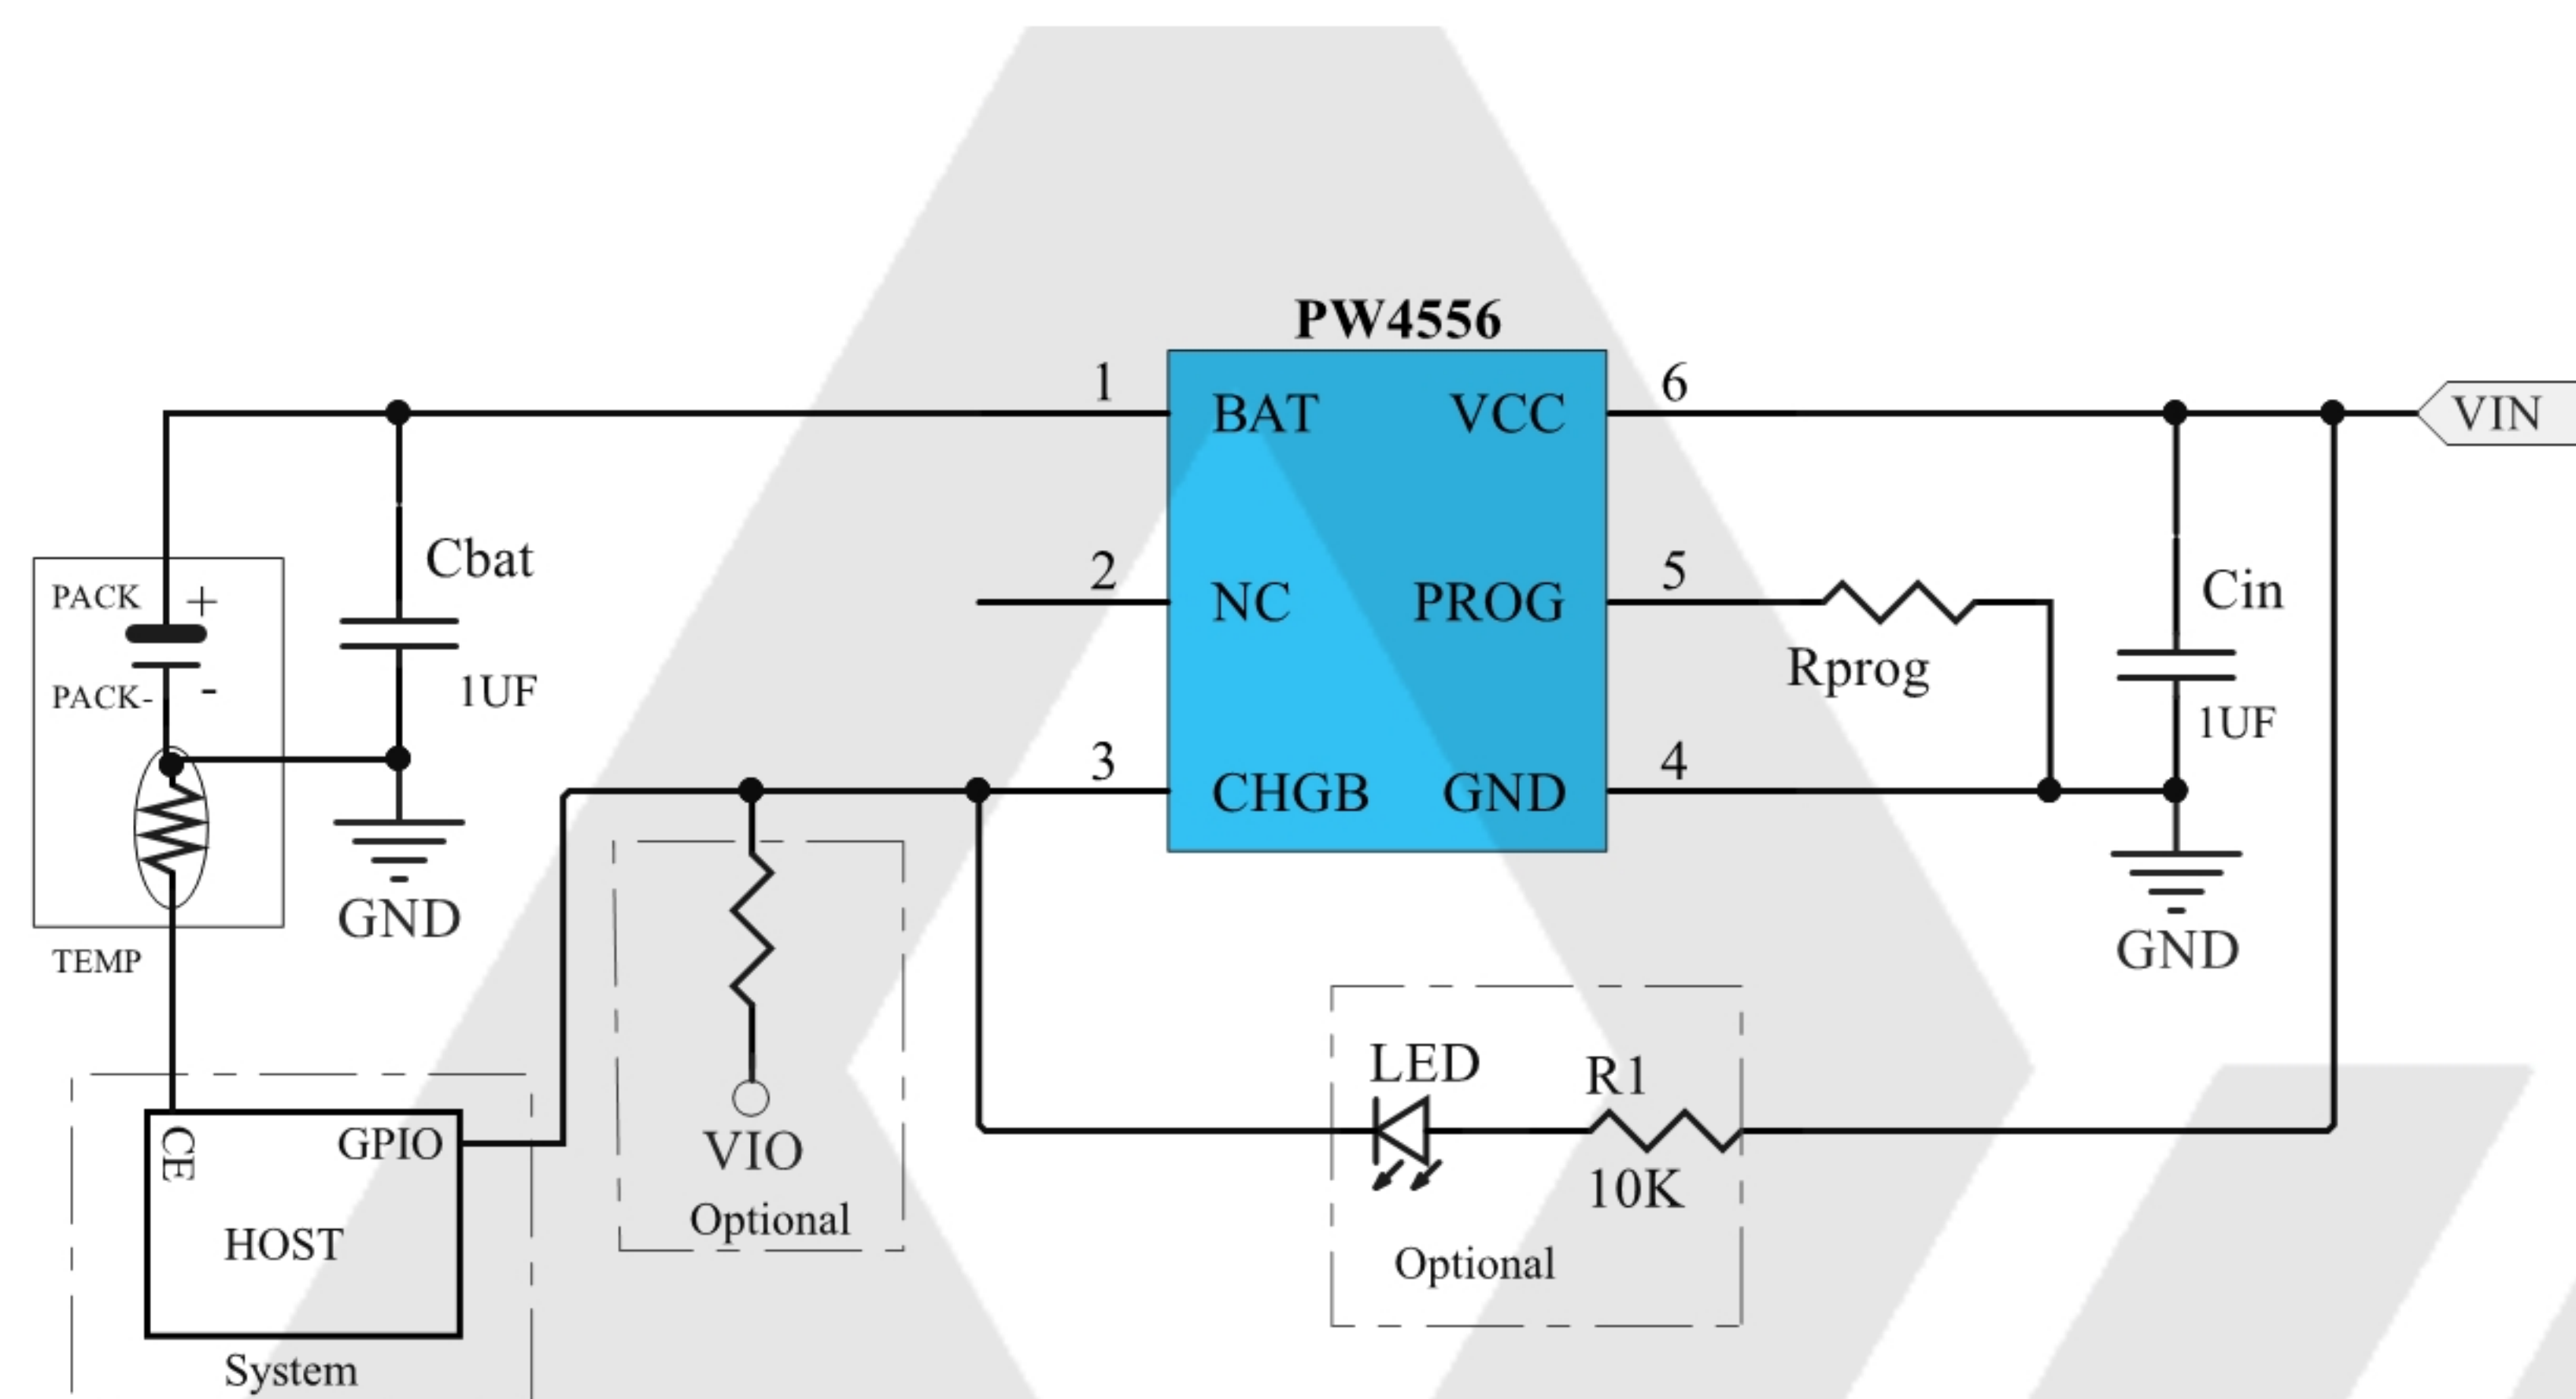

## PIN ASSIGNMENT/DESCRIPTION

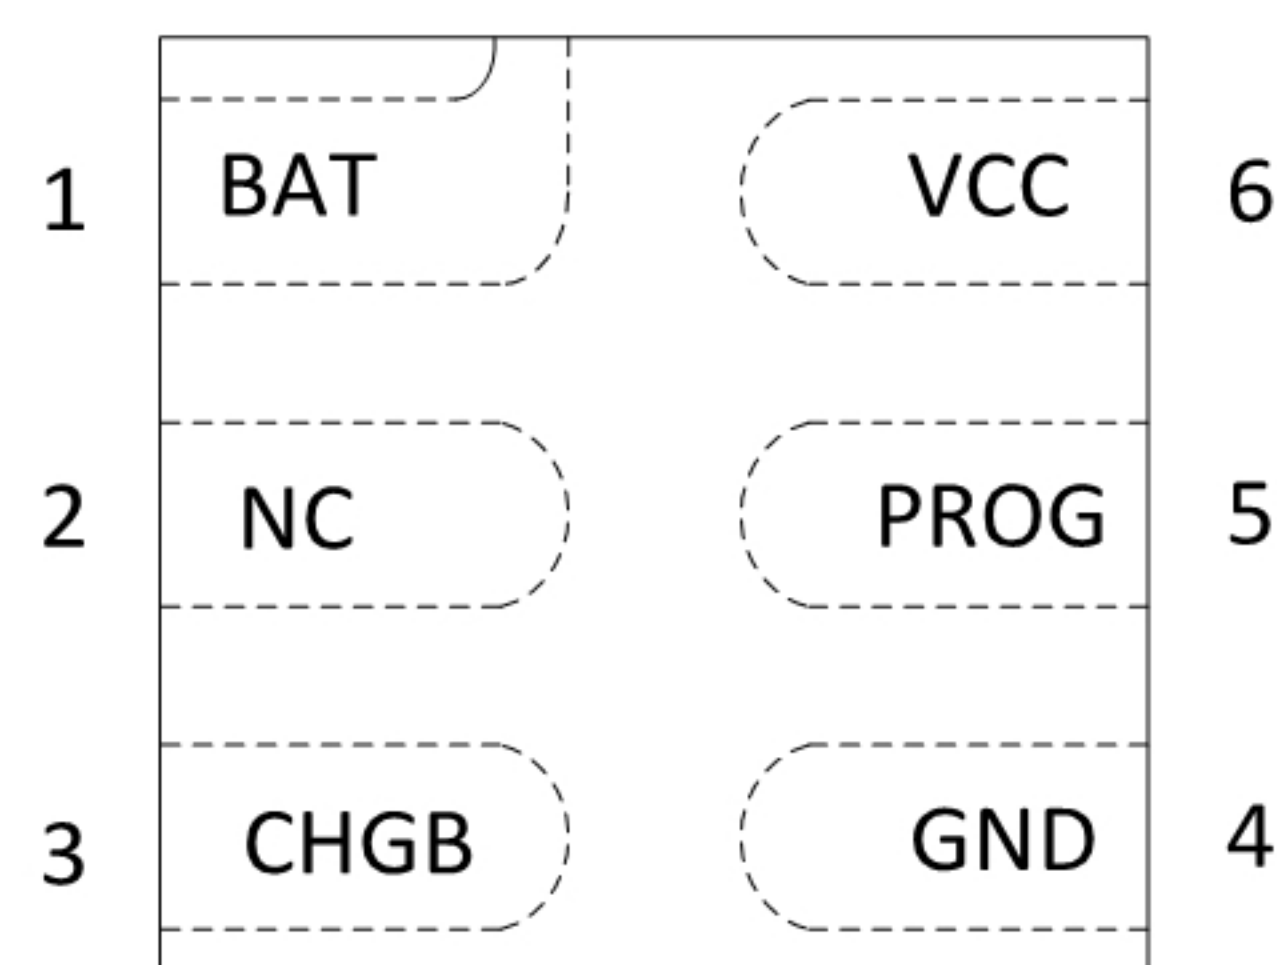

TOP VIEW

TDFN1X1-6L

Pin No	Pin Name	Functions
1	BAT	Charge Current Output. Provides charge current to the battery and regulates the final float voltage to 4.2V or 4.35V.
2	NC	-
3	CHGB	Open-Drain Charge Status Output. When the battery is charging, the CHGB pin is pulled low. When the charge cycle is completed or VCC is removed, the CHGB is forced high impedance.
4	GND	Ground
5	PROG	Charge current setting, charge current monitor. The charging current is given by $IBAT = 100/RPROG(A)$ . Please choose 1% precision resistor for RPROG. For fixed charge current part, this pin is no bonding wire.
6	VCC	Power Supply



## RECOMMENDED OPERATING RANGE


SYMBOL	ITEMS	MIN	NOM	MAX	UNIT
V <sub>CC</sub>	Input operating voltage range	4.5	5	5.5	V
I <sub>BAT</sub>	Battery charge current range	1	50	250	mA
T <sub>J</sub>	Junction temperature	0		125	°C
R <sub>PROG</sub>	CC mode charge current programming resistor	1	2	100	KΩ

## Absolute Maximum Ratings (note)

SYMBOL	ITEMS	VALUE	UNIT
V <sub>CC</sub>	Input Voltage	-0.3~7	V
V <sub>PROG</sub>	PROG Voltage	-0.3~7	V
V <sub>BAT</sub>	BAT Voltage	-0.3~7	V
V <sub>CHGB</sub>	CHGB Voltage	-0.3~7	V
I <sub>BAT</sub>	Battery Charge Current	300	mA
P <sub>DMAX</sub>	Power Dissipation	0.5	W
T <sub>J</sub>	Junction Temperature	-40~125	°C
T <sub>STG</sub>	Storage Temperature	-55 to 150	°C
T <sub>SOLDER</sub>	Package Lead Soldering Temperature	260°C, 10s	

**Note :** Exceed these limits to damage to the device. Exposure to absolute maximum rating conditions may affect device reliability.

## SIMPLIFIED BLOCK DIAGRAM

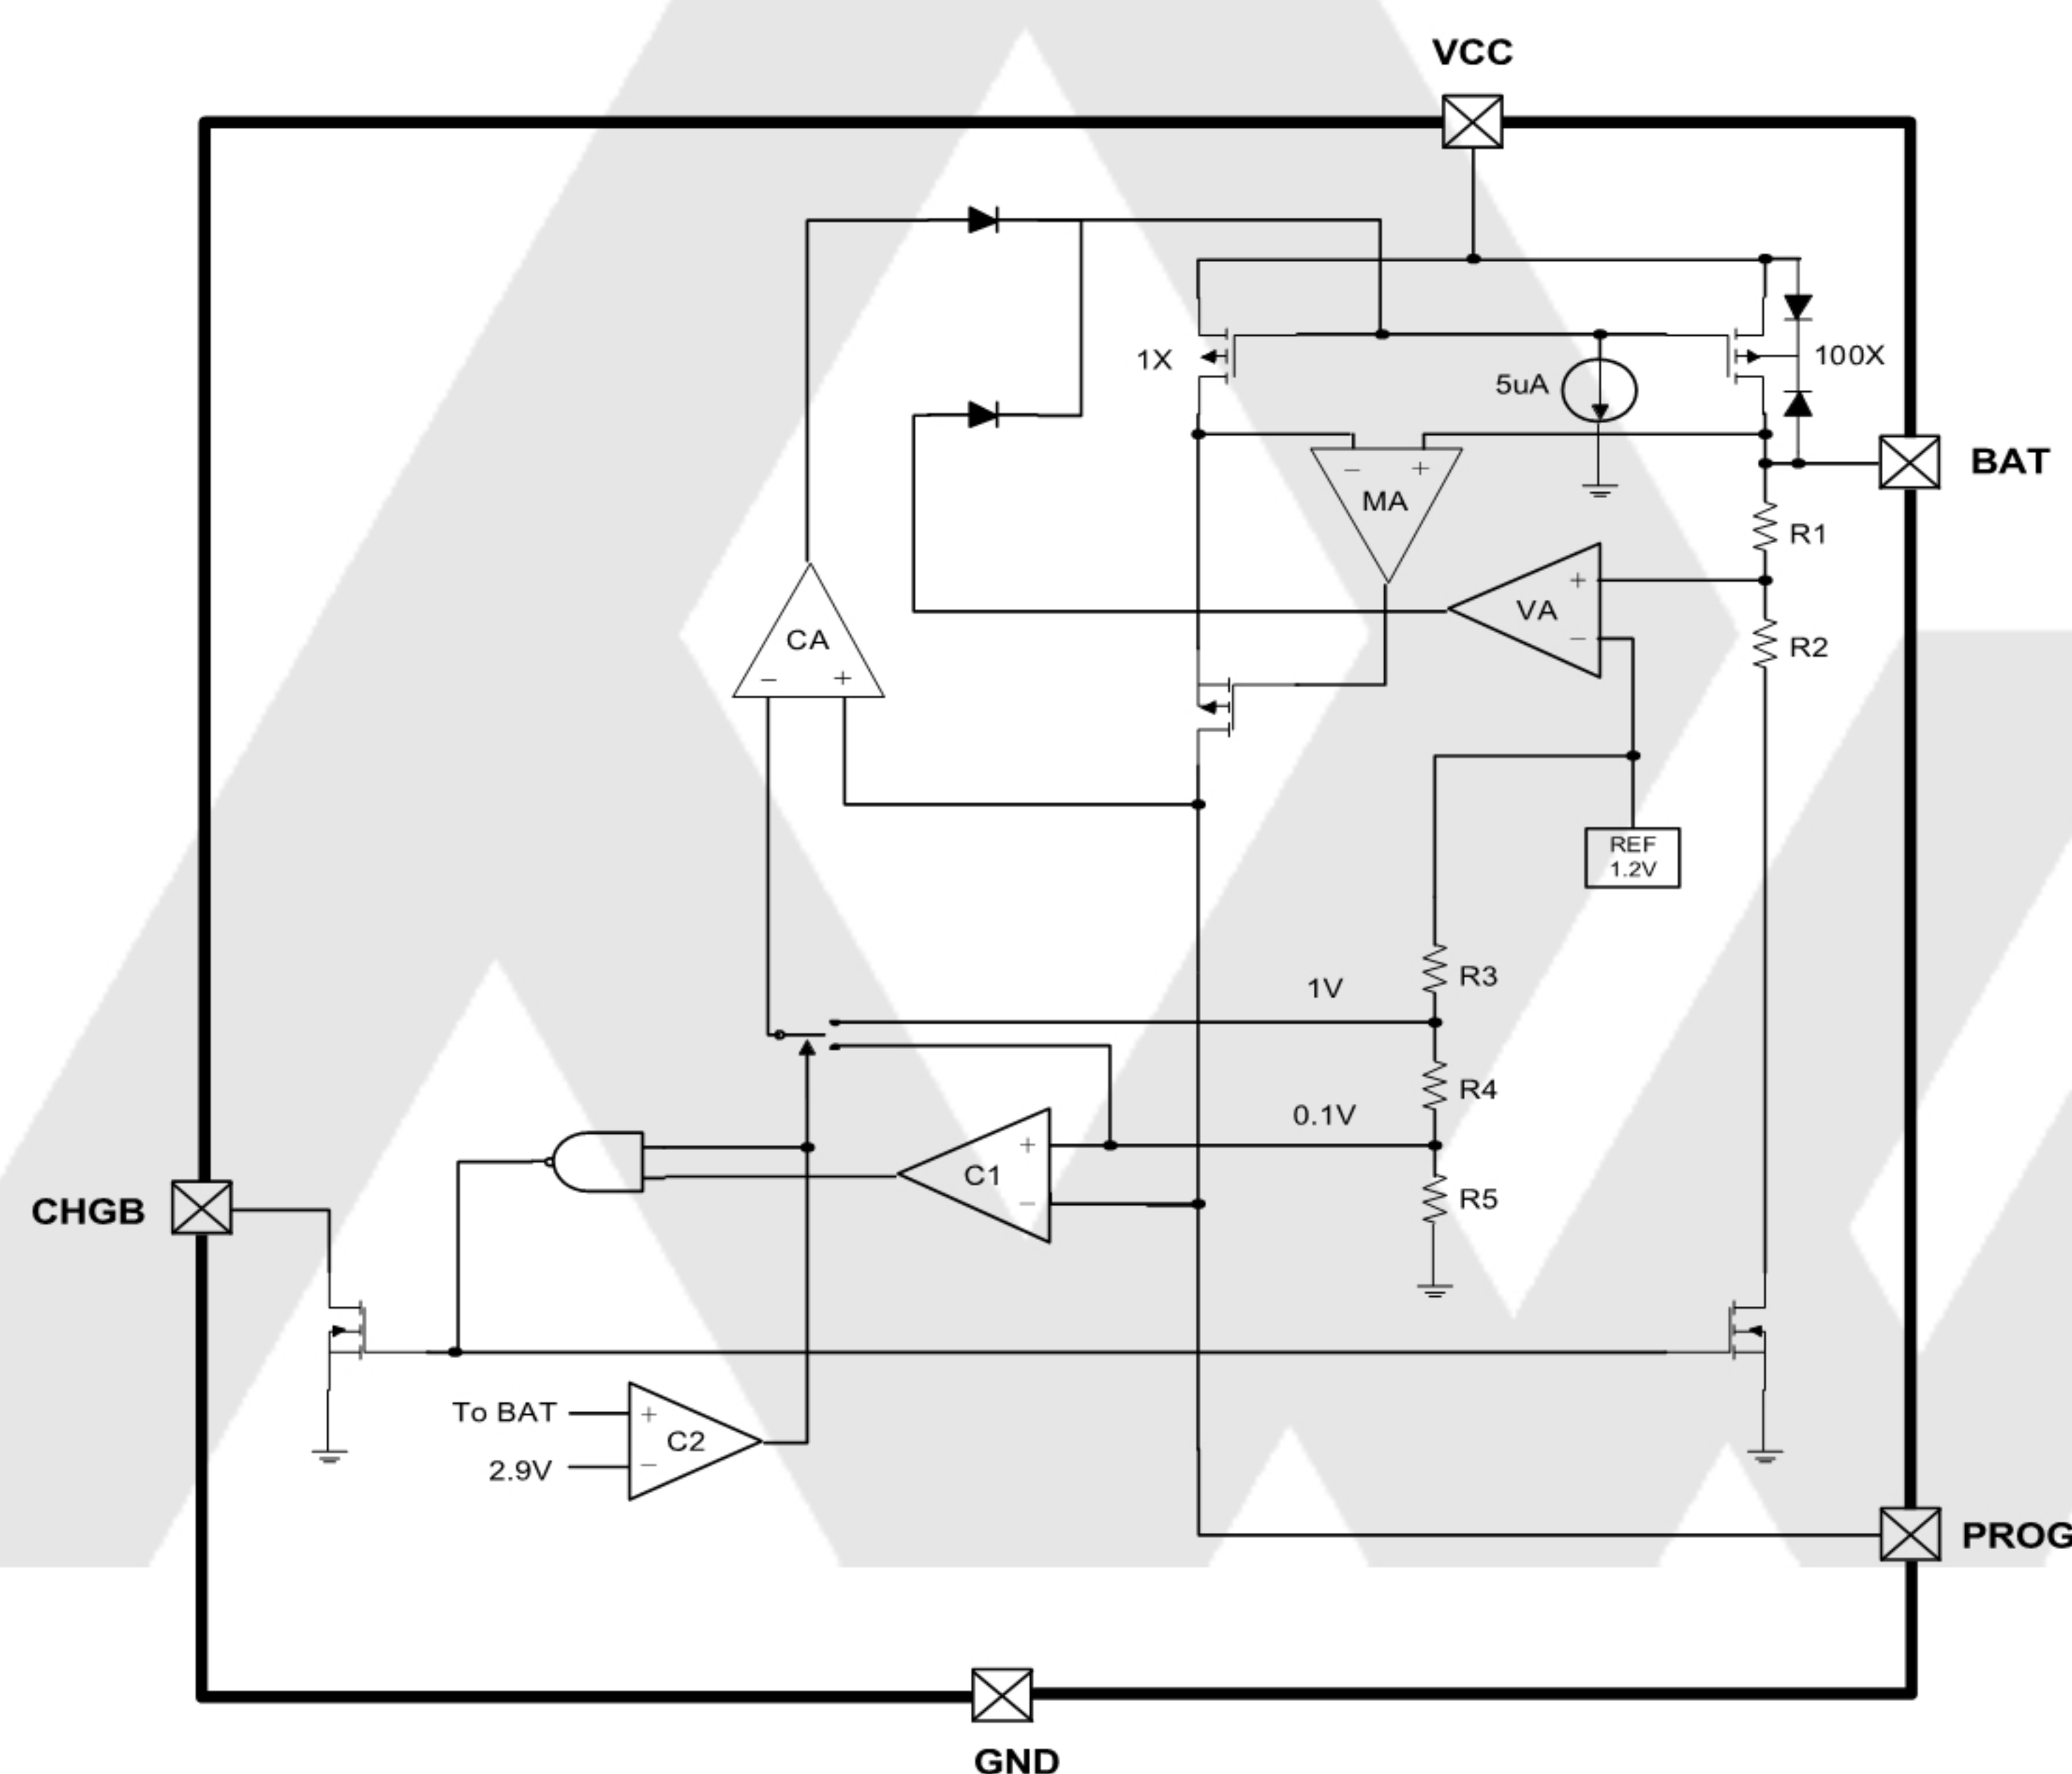



## ELECTRICAL CHARACTERISTICS







The following specifications apply for  $V_{CC}=5V$   $T_A=25^{\circ}C$ , unless specified otherwise.

SYMBOL	ITEMS	CONDITIONS	MIN	TYP	MAX	UNIT
$I_{SPLYCHRG}$	Charge Mode GND Current	$R_{PROG}=1k\Omega, V_{CC}=5V$		89		$\mu A$
$I_{BATCHRG}$	Charge Mode Battery Current	$R_{PROG}=1k\Omega$	95	100	105	mA
		$R_{PROG}=2k\Omega$	47.5	50	52.5	
		$R_{PROG}=4k\Omega$	23.7	25	26.3	
$I_{SPLYSTBY}$	Standby Mode Supply Current	Charge Terminated	65	70	85	$\mu A$
$I_{BATSTBY}$	Standby Mode Battery Current	Charge Terminated		2.4		$\mu A$
$I_{SPLYASD}$	Shutdown Mode Supply Current	$V_{CC}<V_{BAT}<V_{CC}+0.3V$ / $V_{CC}<UVLO$ , no battery		27		$\mu A$
$I_{BATASD}$	Shutdown Mode BAT Pin Current	$V_{BAT} - V_{CC}>0.3V$		0.52		$\mu A$
$I_{BATSLEEP1}$	Sleep Mode BAT Pin Current	$V_{CC}=0$ or $V_{CC}$ Floating $T_A=25^{\circ}C$		0		$\mu A$
$I_{BATSLEEP2}$	Sleep Mode BAT Pin Current	$V_{CC}=0$ or $V_{CC}$ Floating $T_A=0^{\circ}C\sim 85^{\circ}C$ , Note 3		40	45	nA
$V_{FLOAT}$	Float Voltage		4.158	4.2	4.242	V
			4.306	4.35	4.394	V
$I_{TRIKL}$	Trickle and Terminal Charge Current	$R_{PROG}=1k\Omega$	8	10	12	mA
		$R_{PROG}=2k\Omega$	4	5	6.5	
		$R_{PROG}=4k\Omega$	2	2.5	3.5	
$V_{TRIKL}$	Trickle Charge Voltage Threshold	$V_{BAT}$ from low to high	2.8	2.9	3.0	V
$V_{TRIKL, HYS}$	Trickle Charge Voltage Hysteresis	$V_{BAT}$ from high to low		100		mV
$V_{UVLO}$	UVLO Threshold	$V_{CC}$ from Low to High	3.6	3.8	4.0	V
$V_{UVLO, HYS}$	UVLO Hysteresis	$V_{CC}$ from high to low		270		mV
$V_{ASD}$	$V_{CC}-V_{BAT}$ Lockout Threshold Voltage	$V_{CC}$ from High to Low		80		mV
		$V_{CC}$ from Low to High		130		mV
$\Delta V_{RECHRG}$	Auto Recharge Battery Voltage	$V_{BAT}$ from high to low	100	150	200	mV
$V_{CHGb}$	CHGb Pin Output Low Voltage	$I_{CHGb}=1mA$		0.14	0.3	V
$T_{SS}$	Soft-Start Time	Note 3		190		$\mu s$
$T_{RECHRG}$	Recharge Comparator Filter Time	Note 3		2		ms
$T_{TERM}$	Charge Terminated Filter Time	Note 3		1		ms

**Note:**Guaranteed by Design.




## TYPICAL CHARACTERISTICS

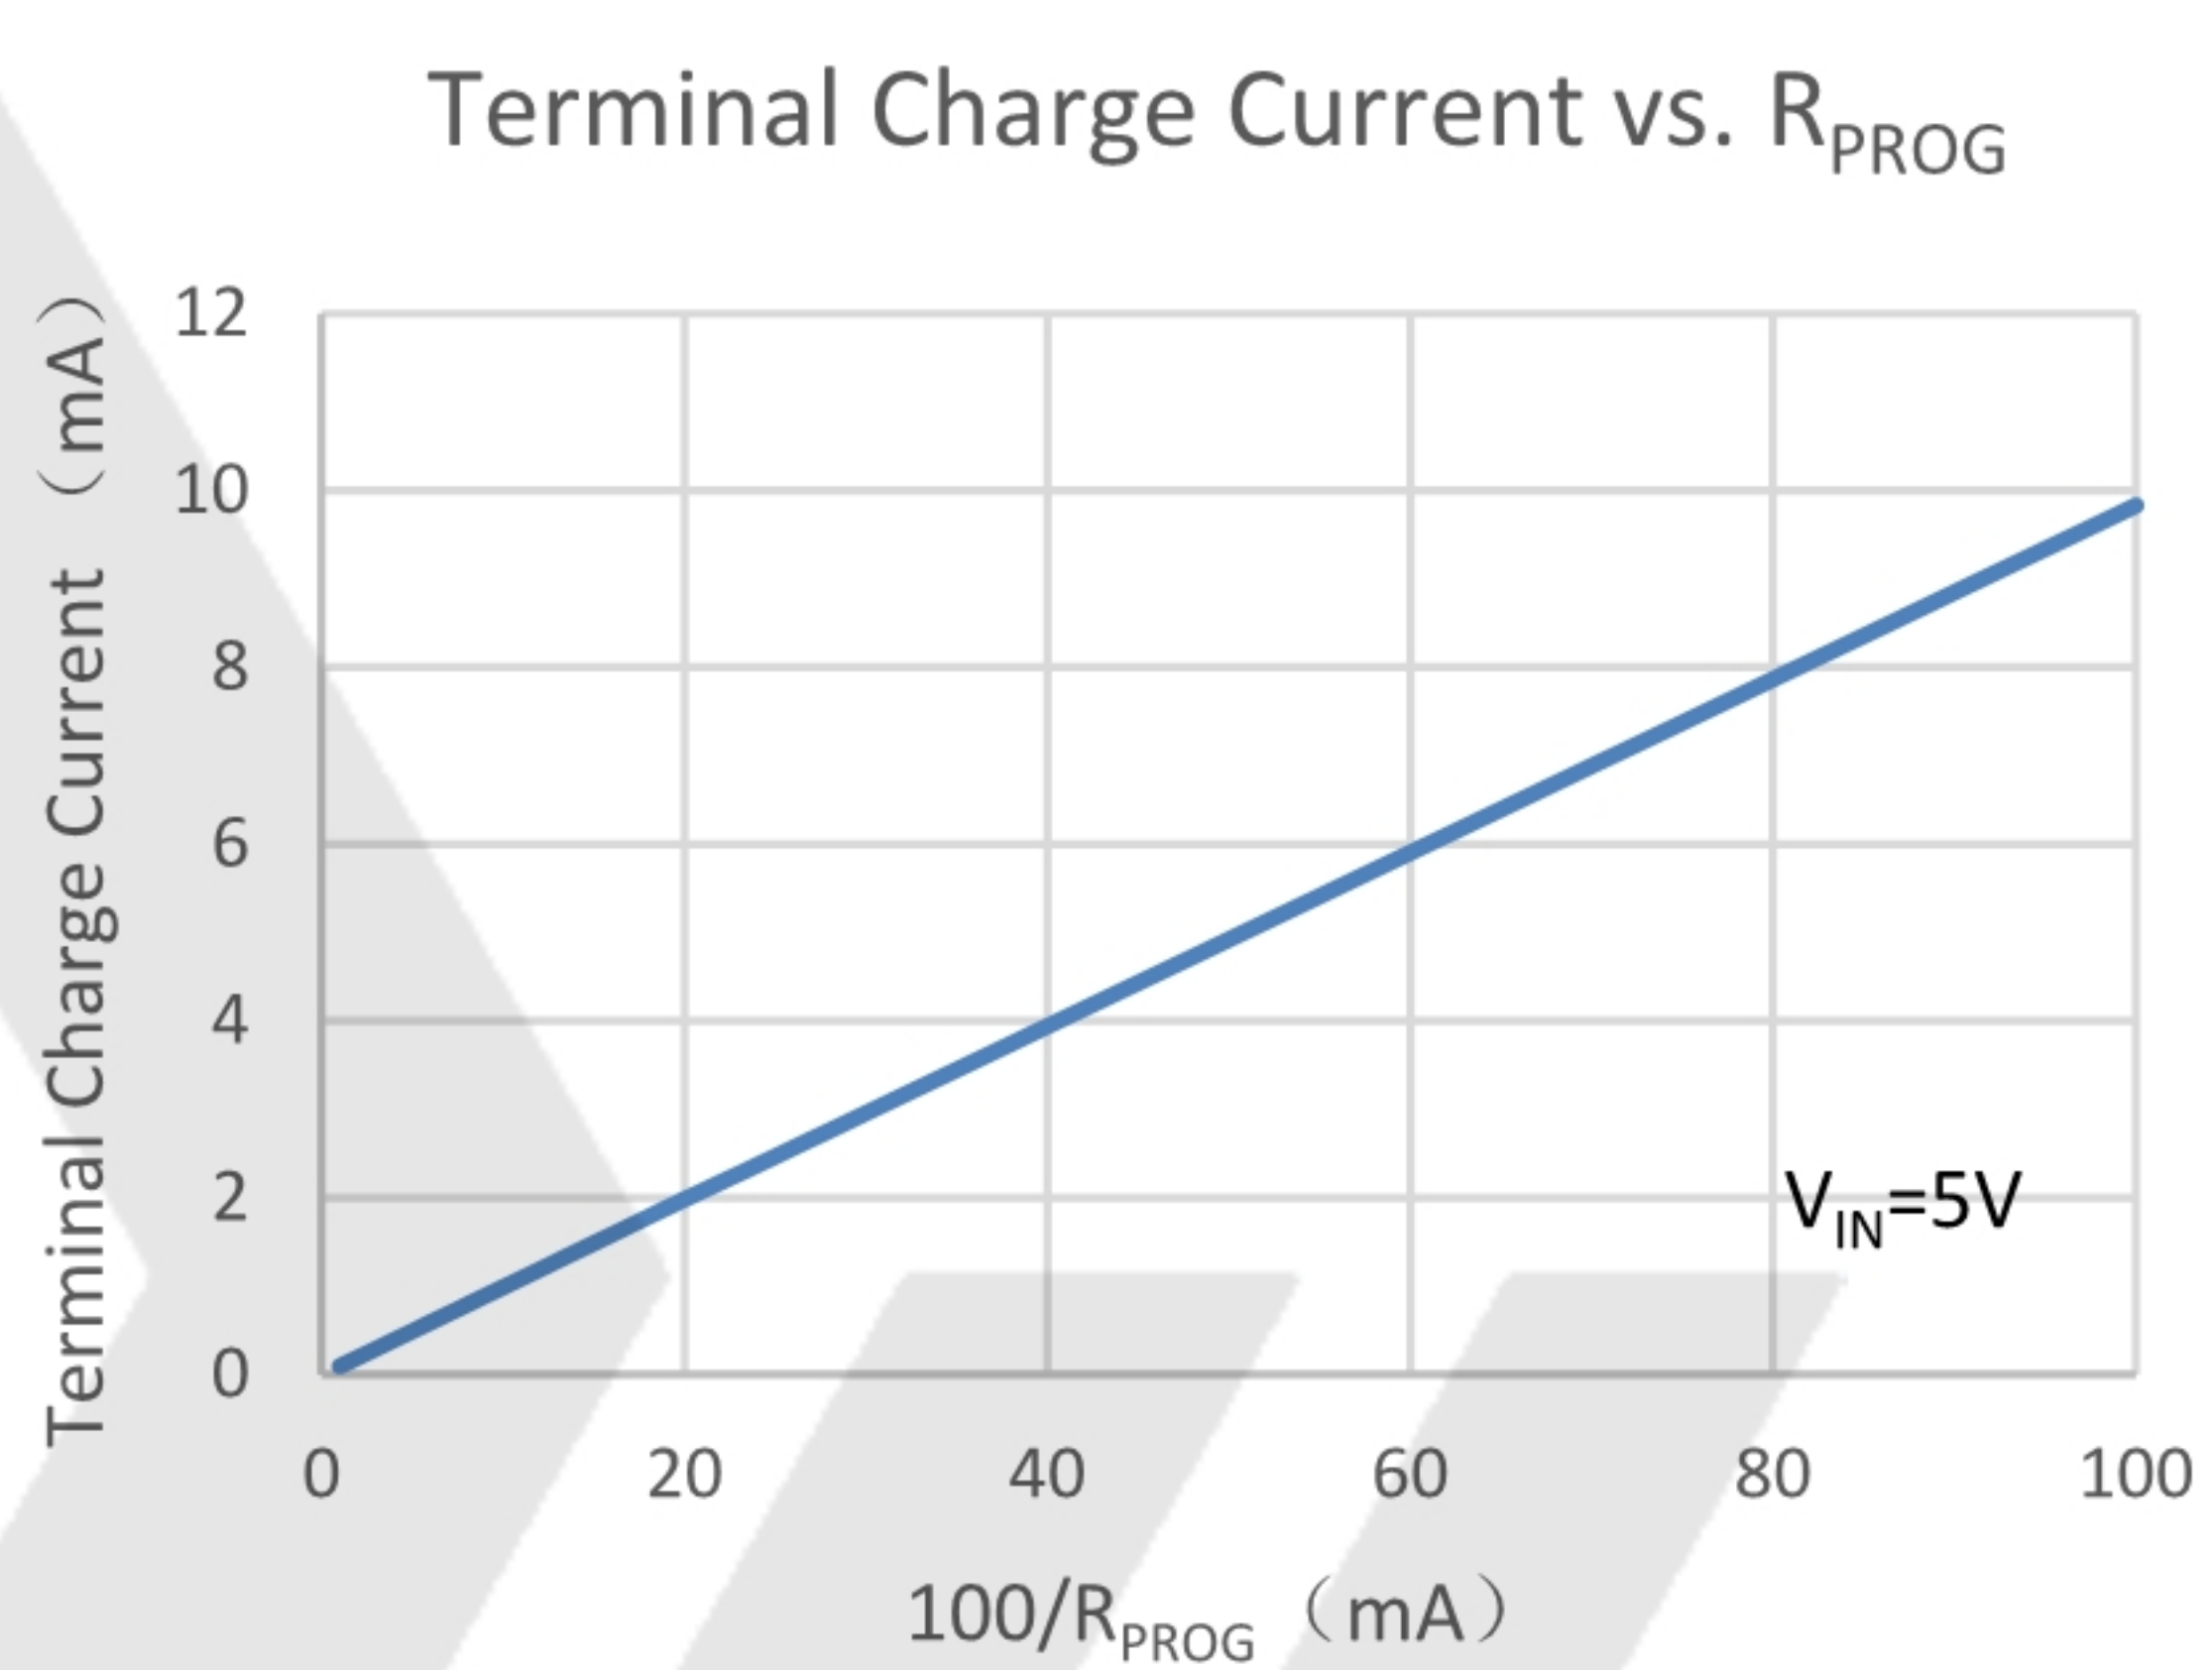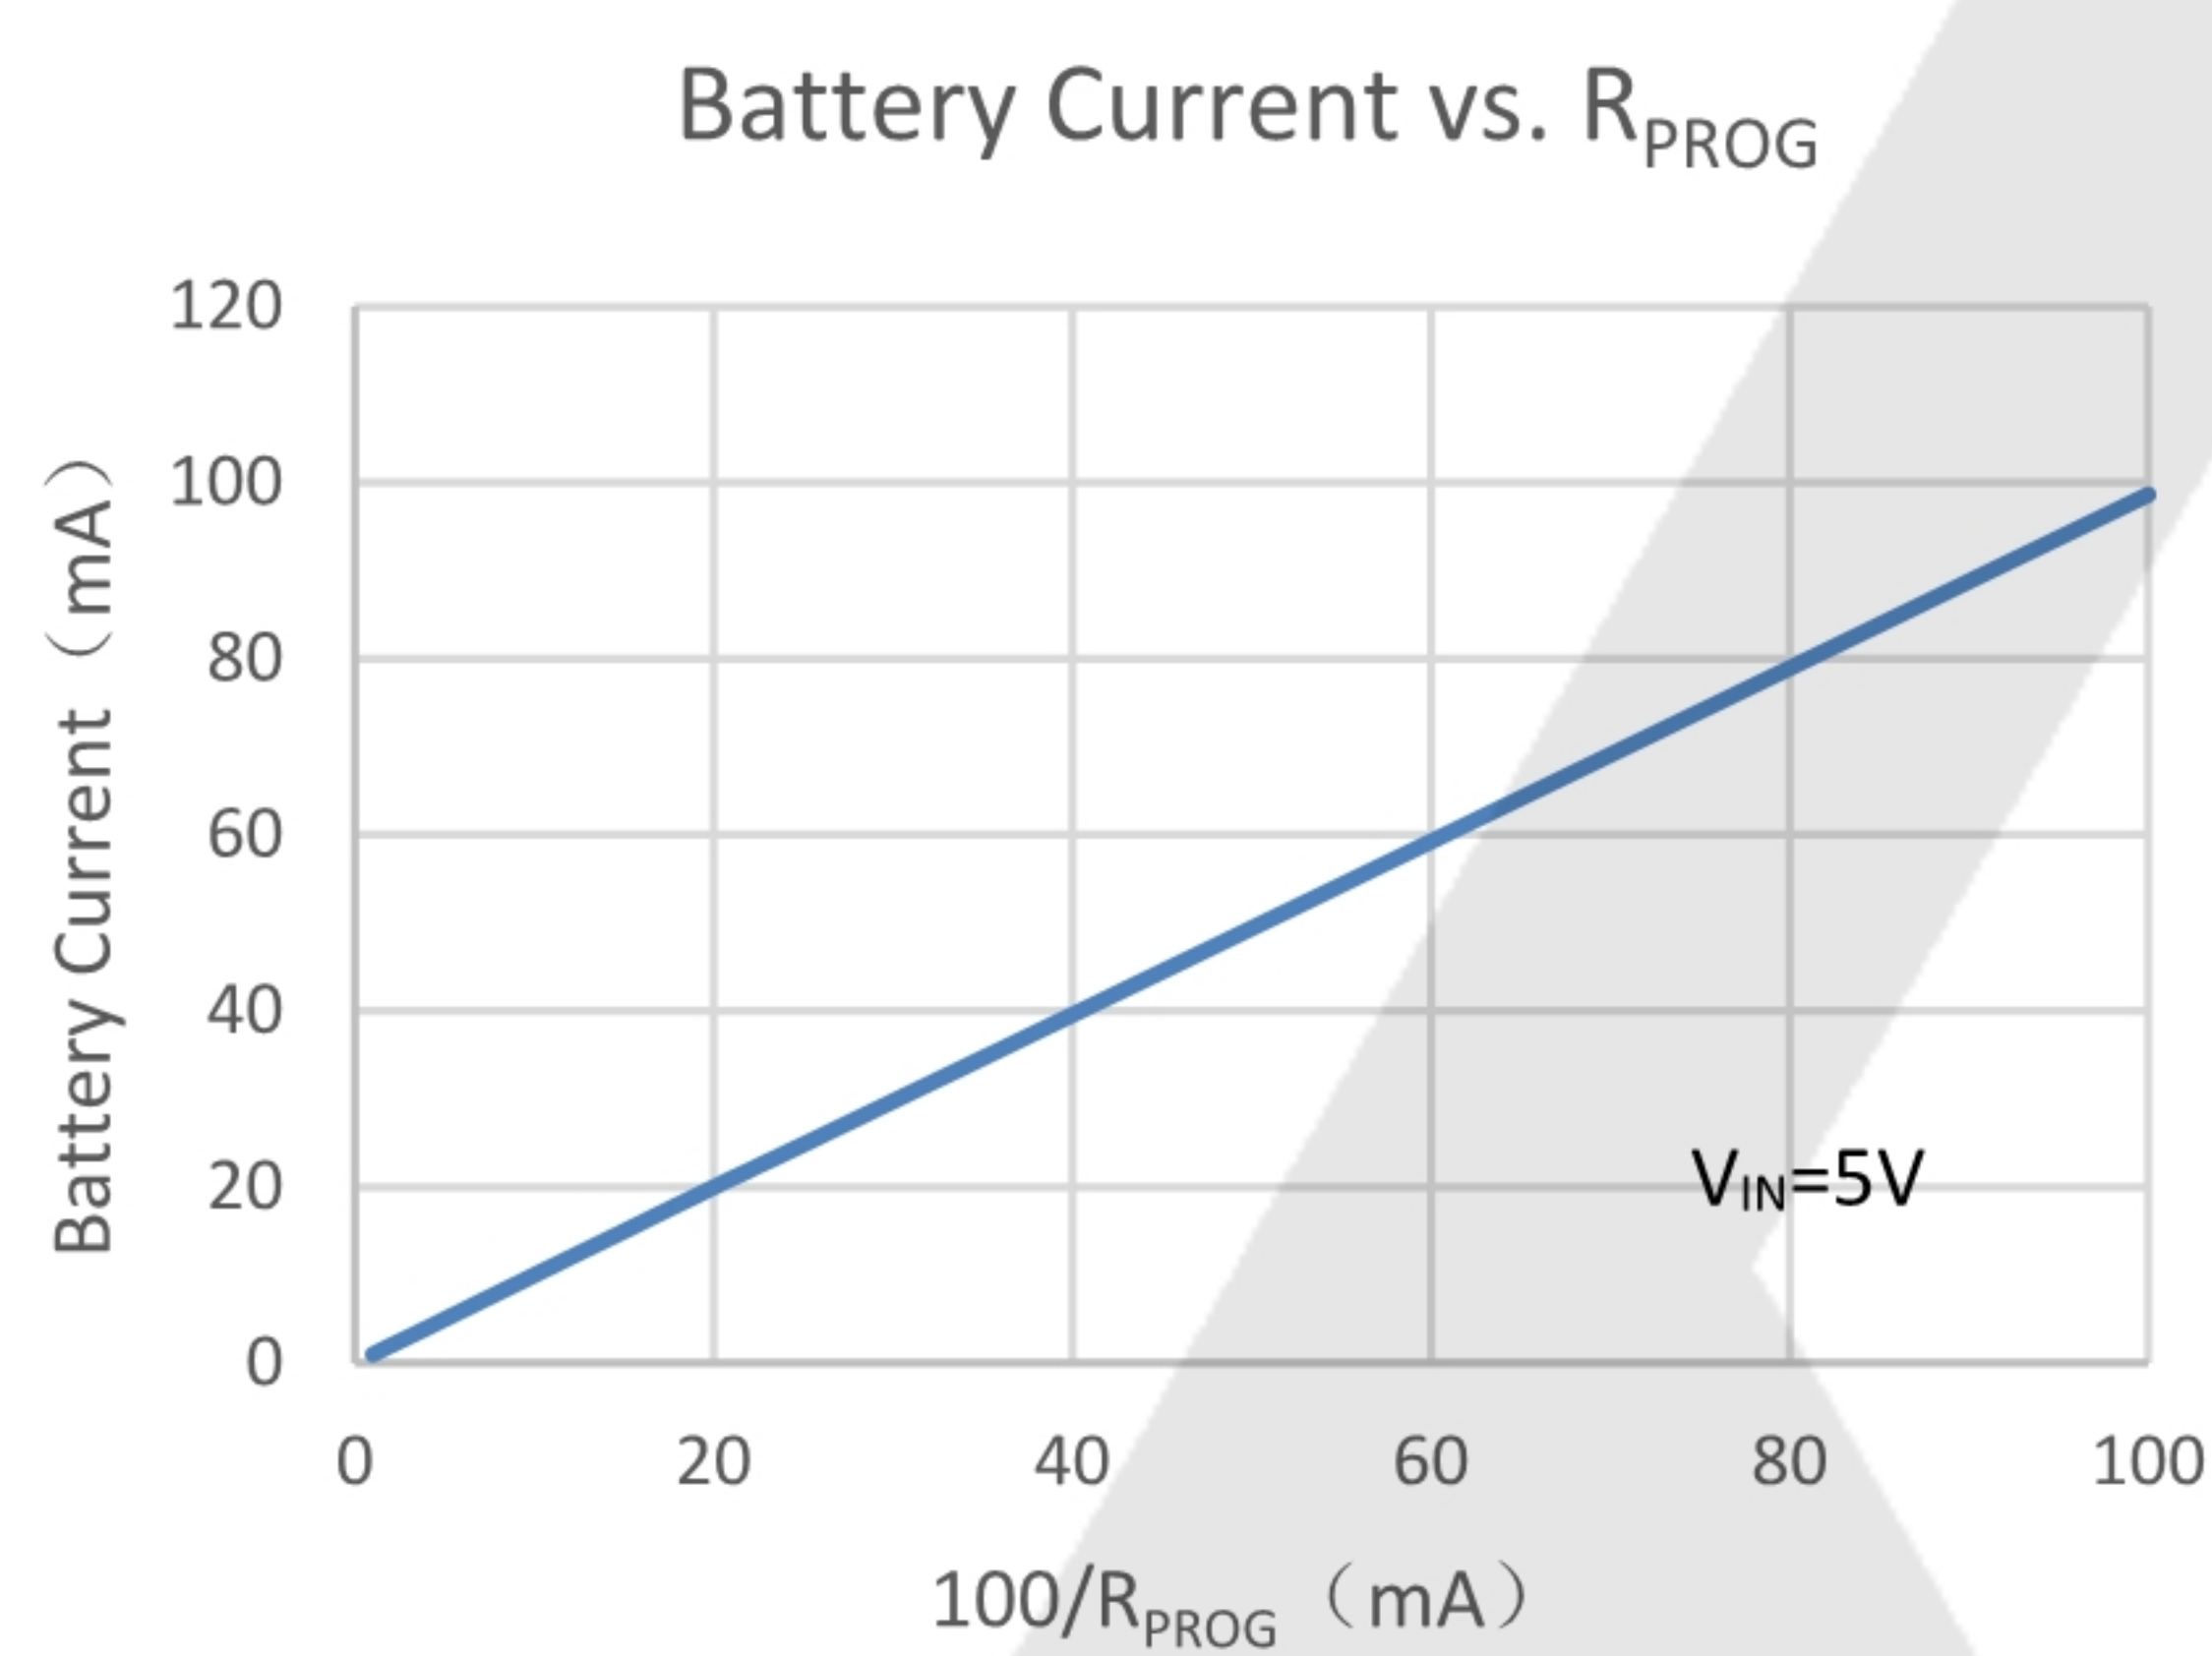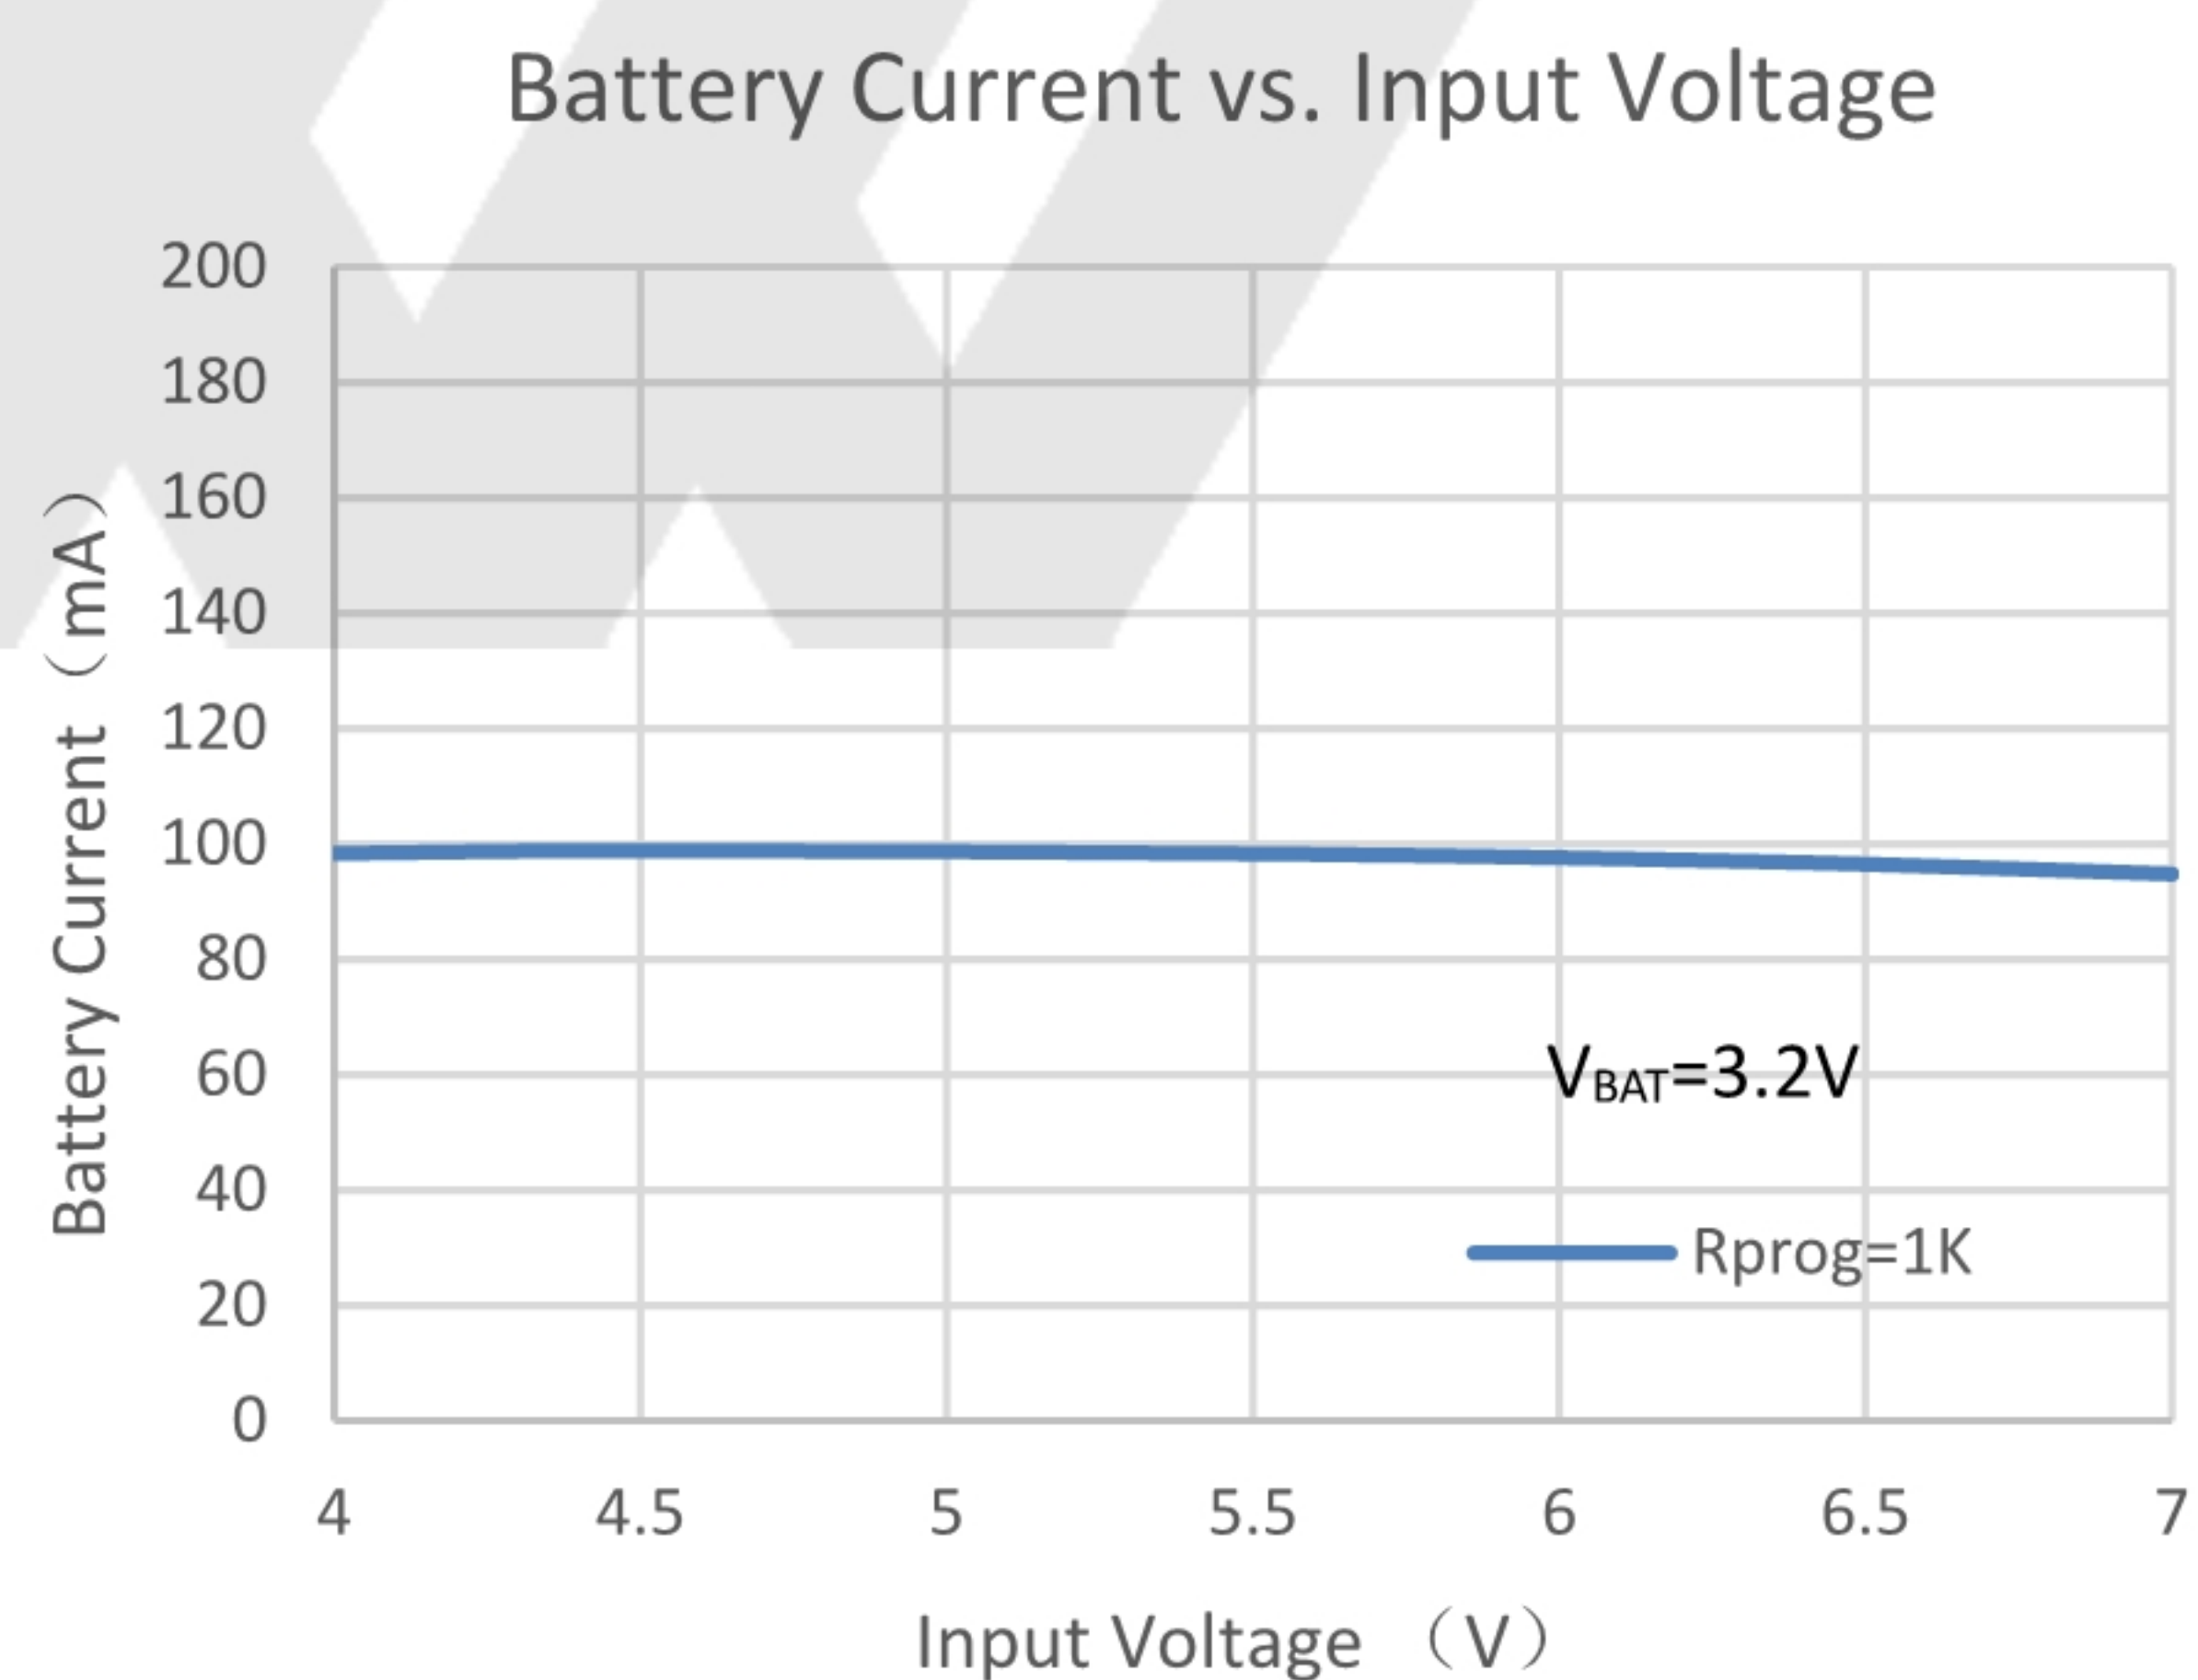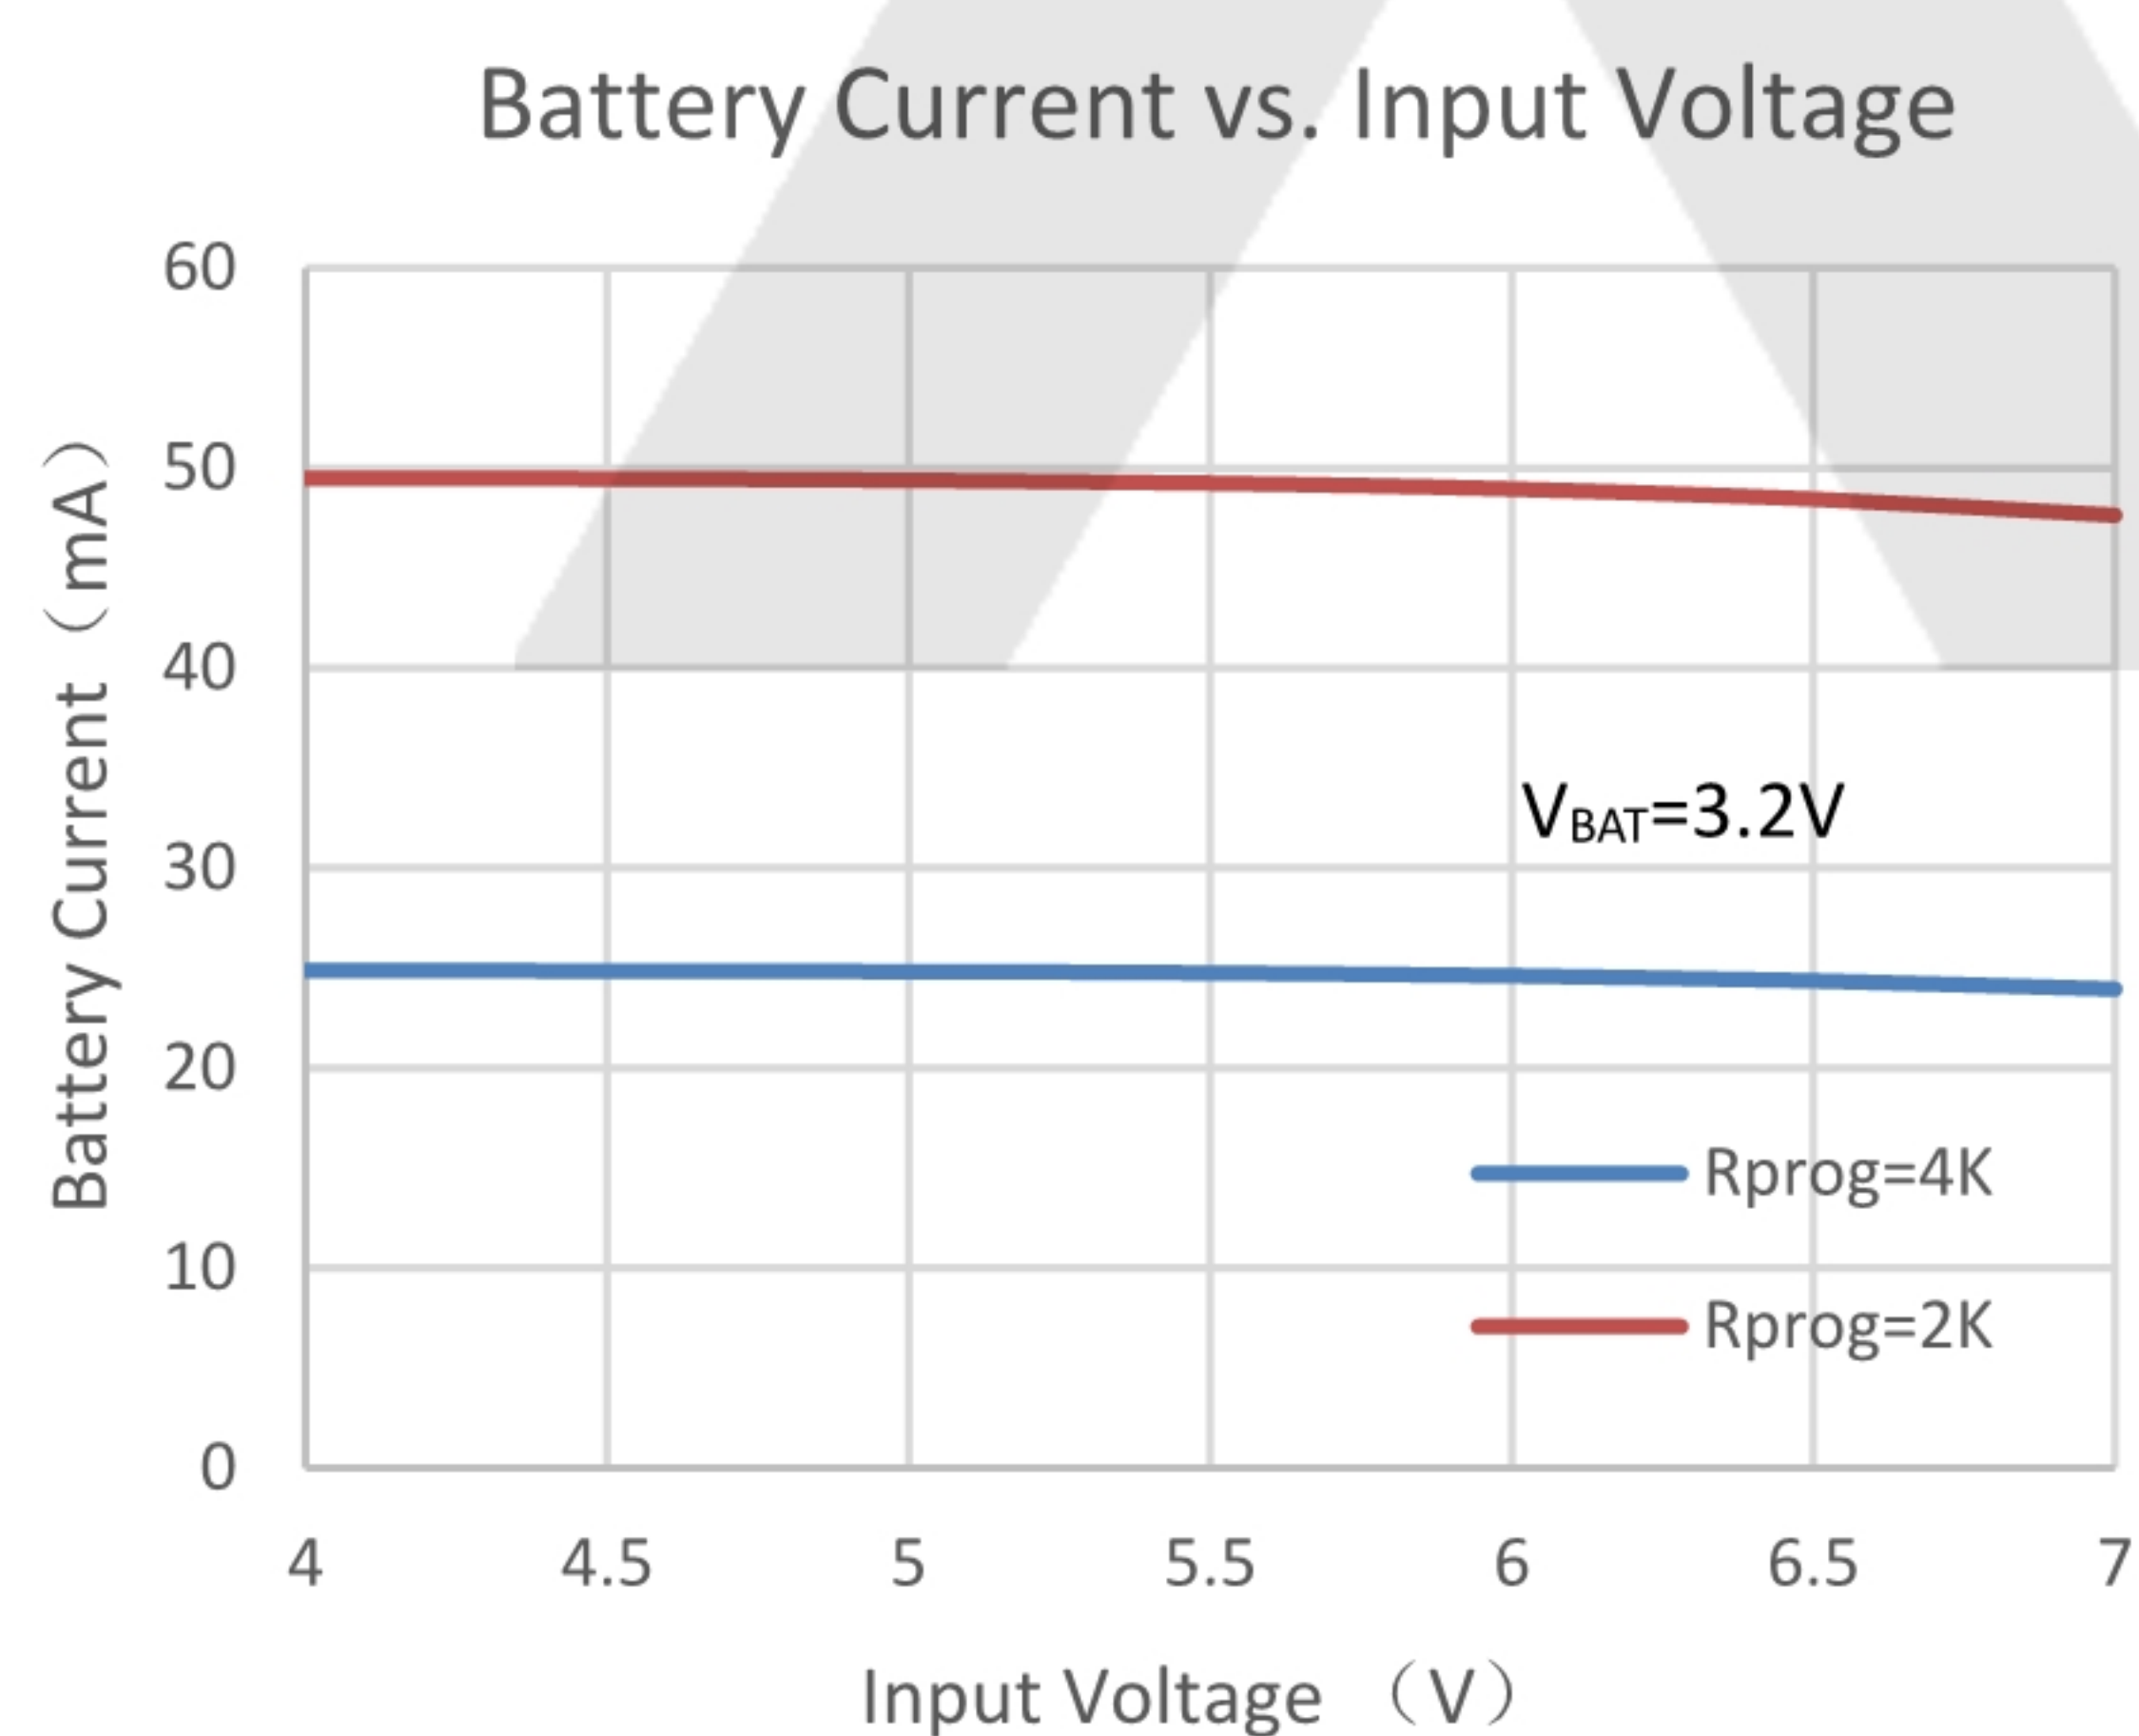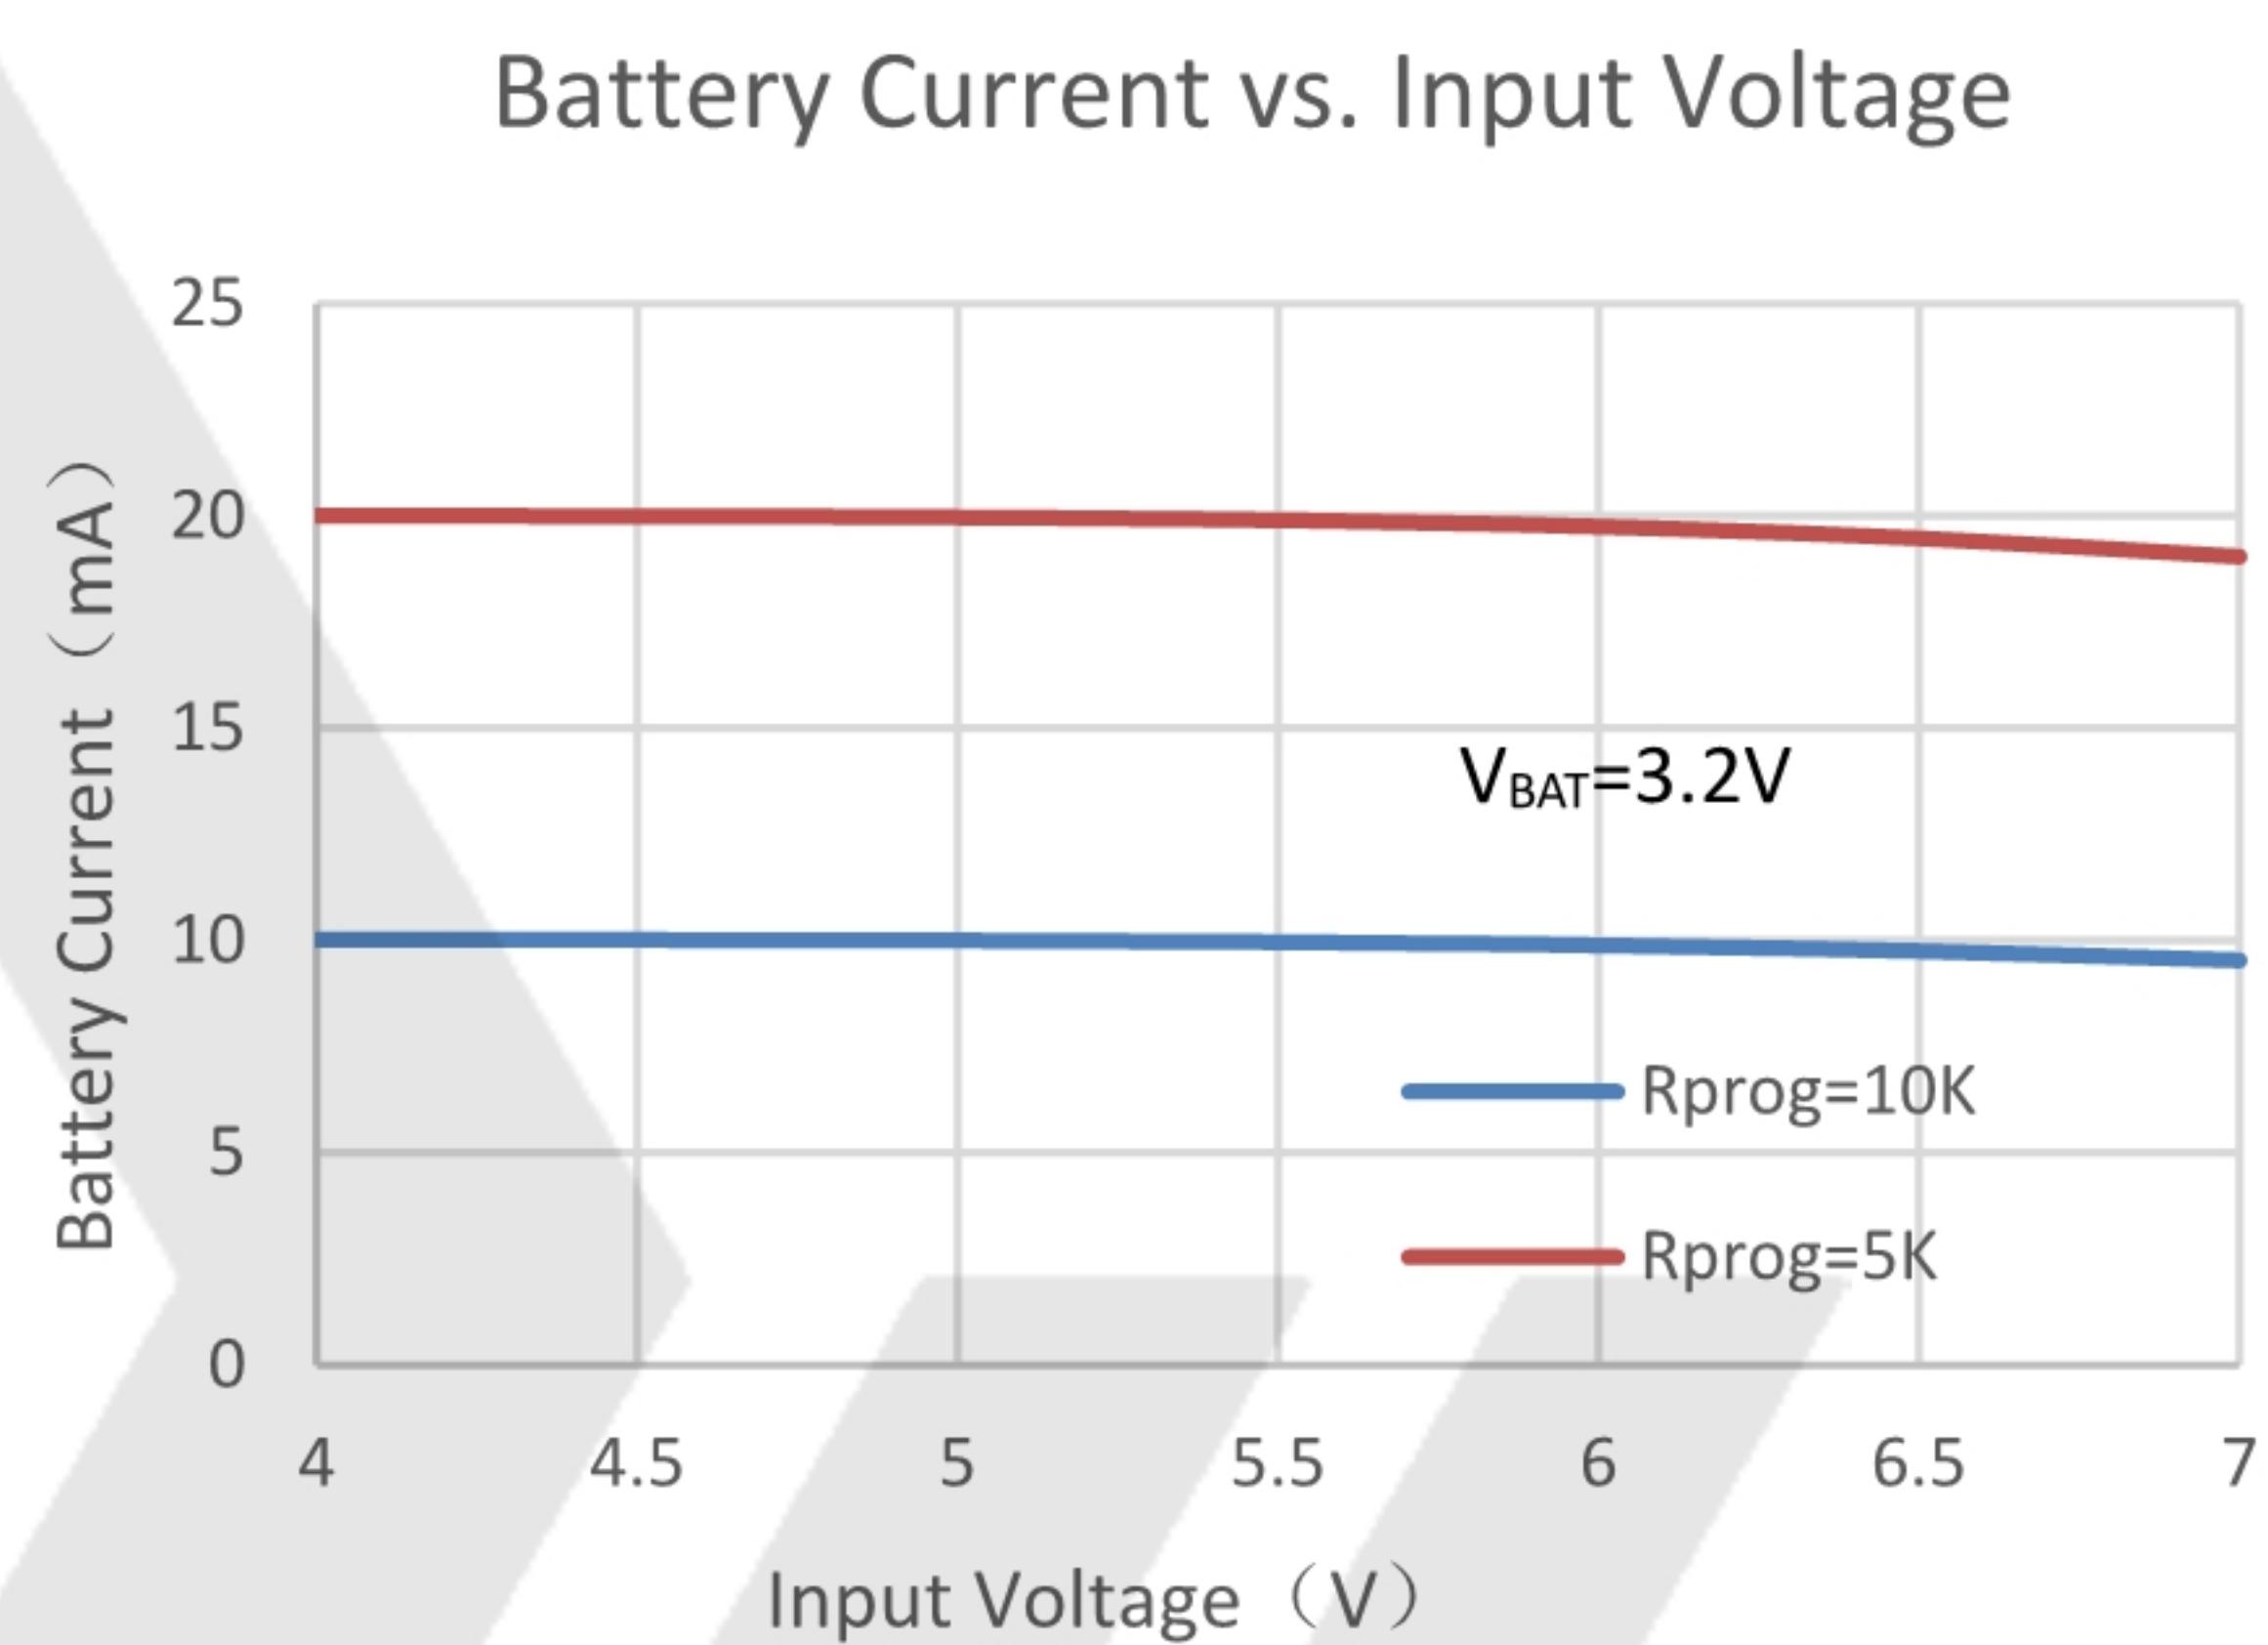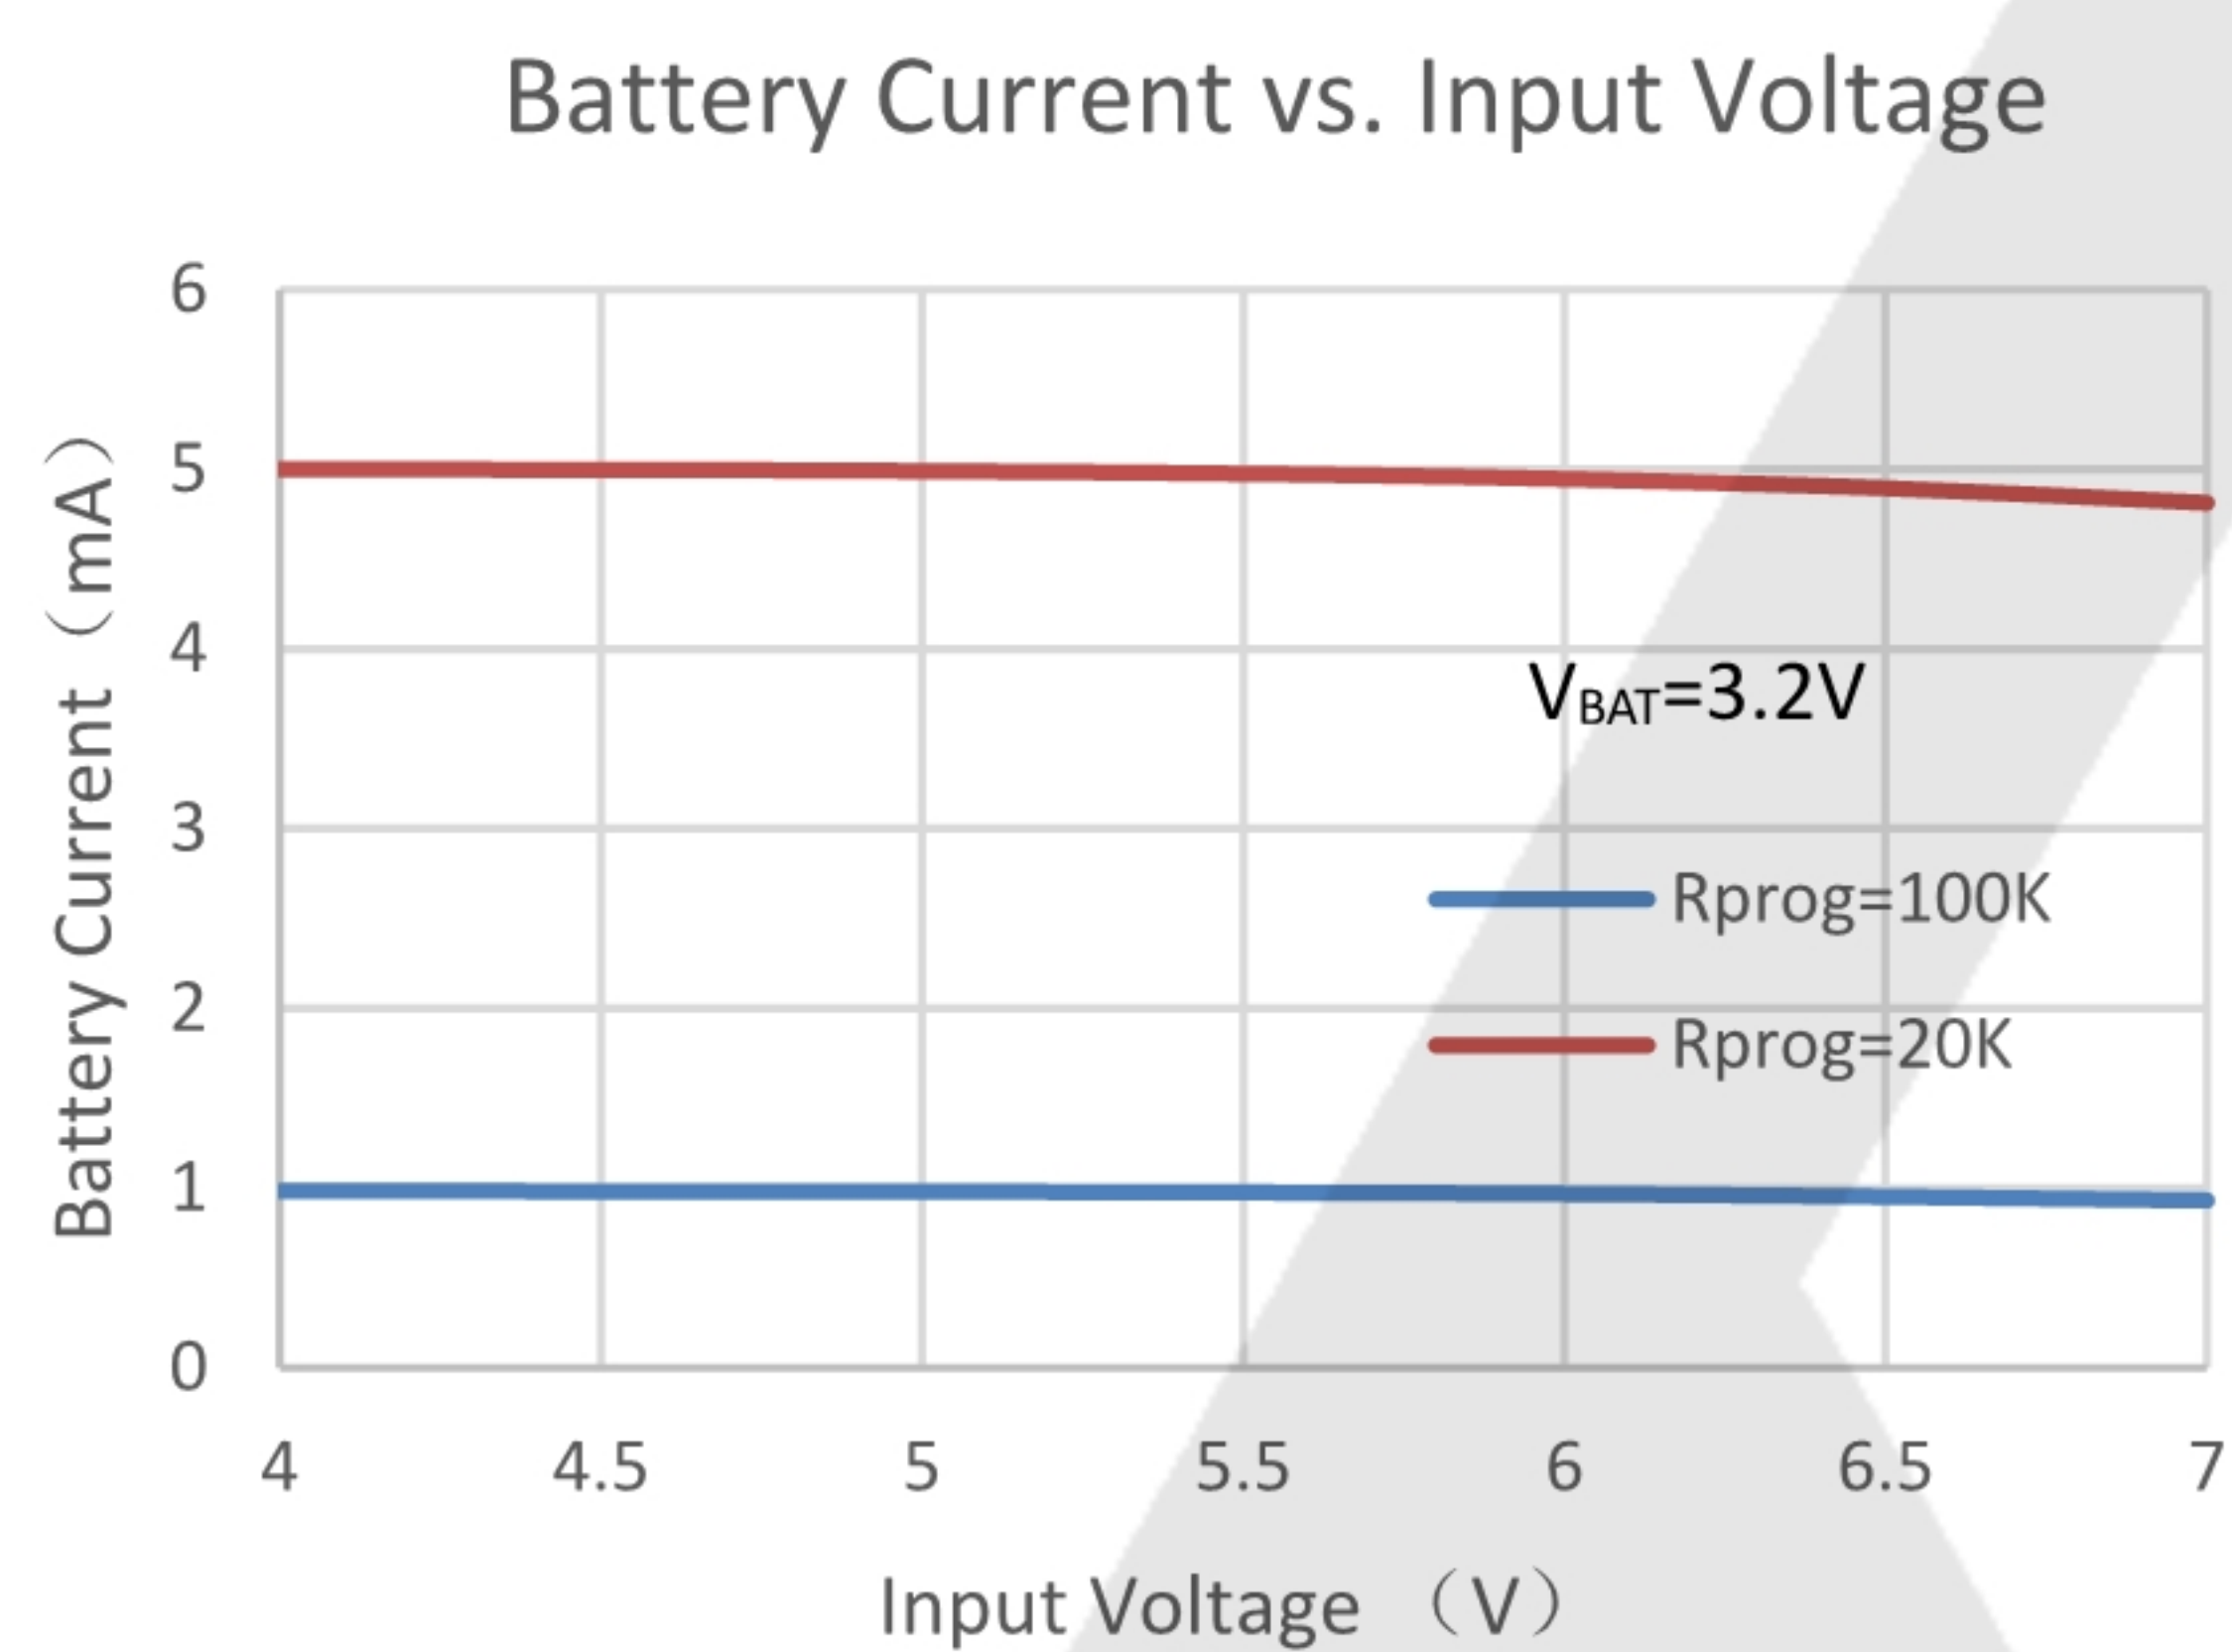





Battery Current vs.  $V_{PROG}$

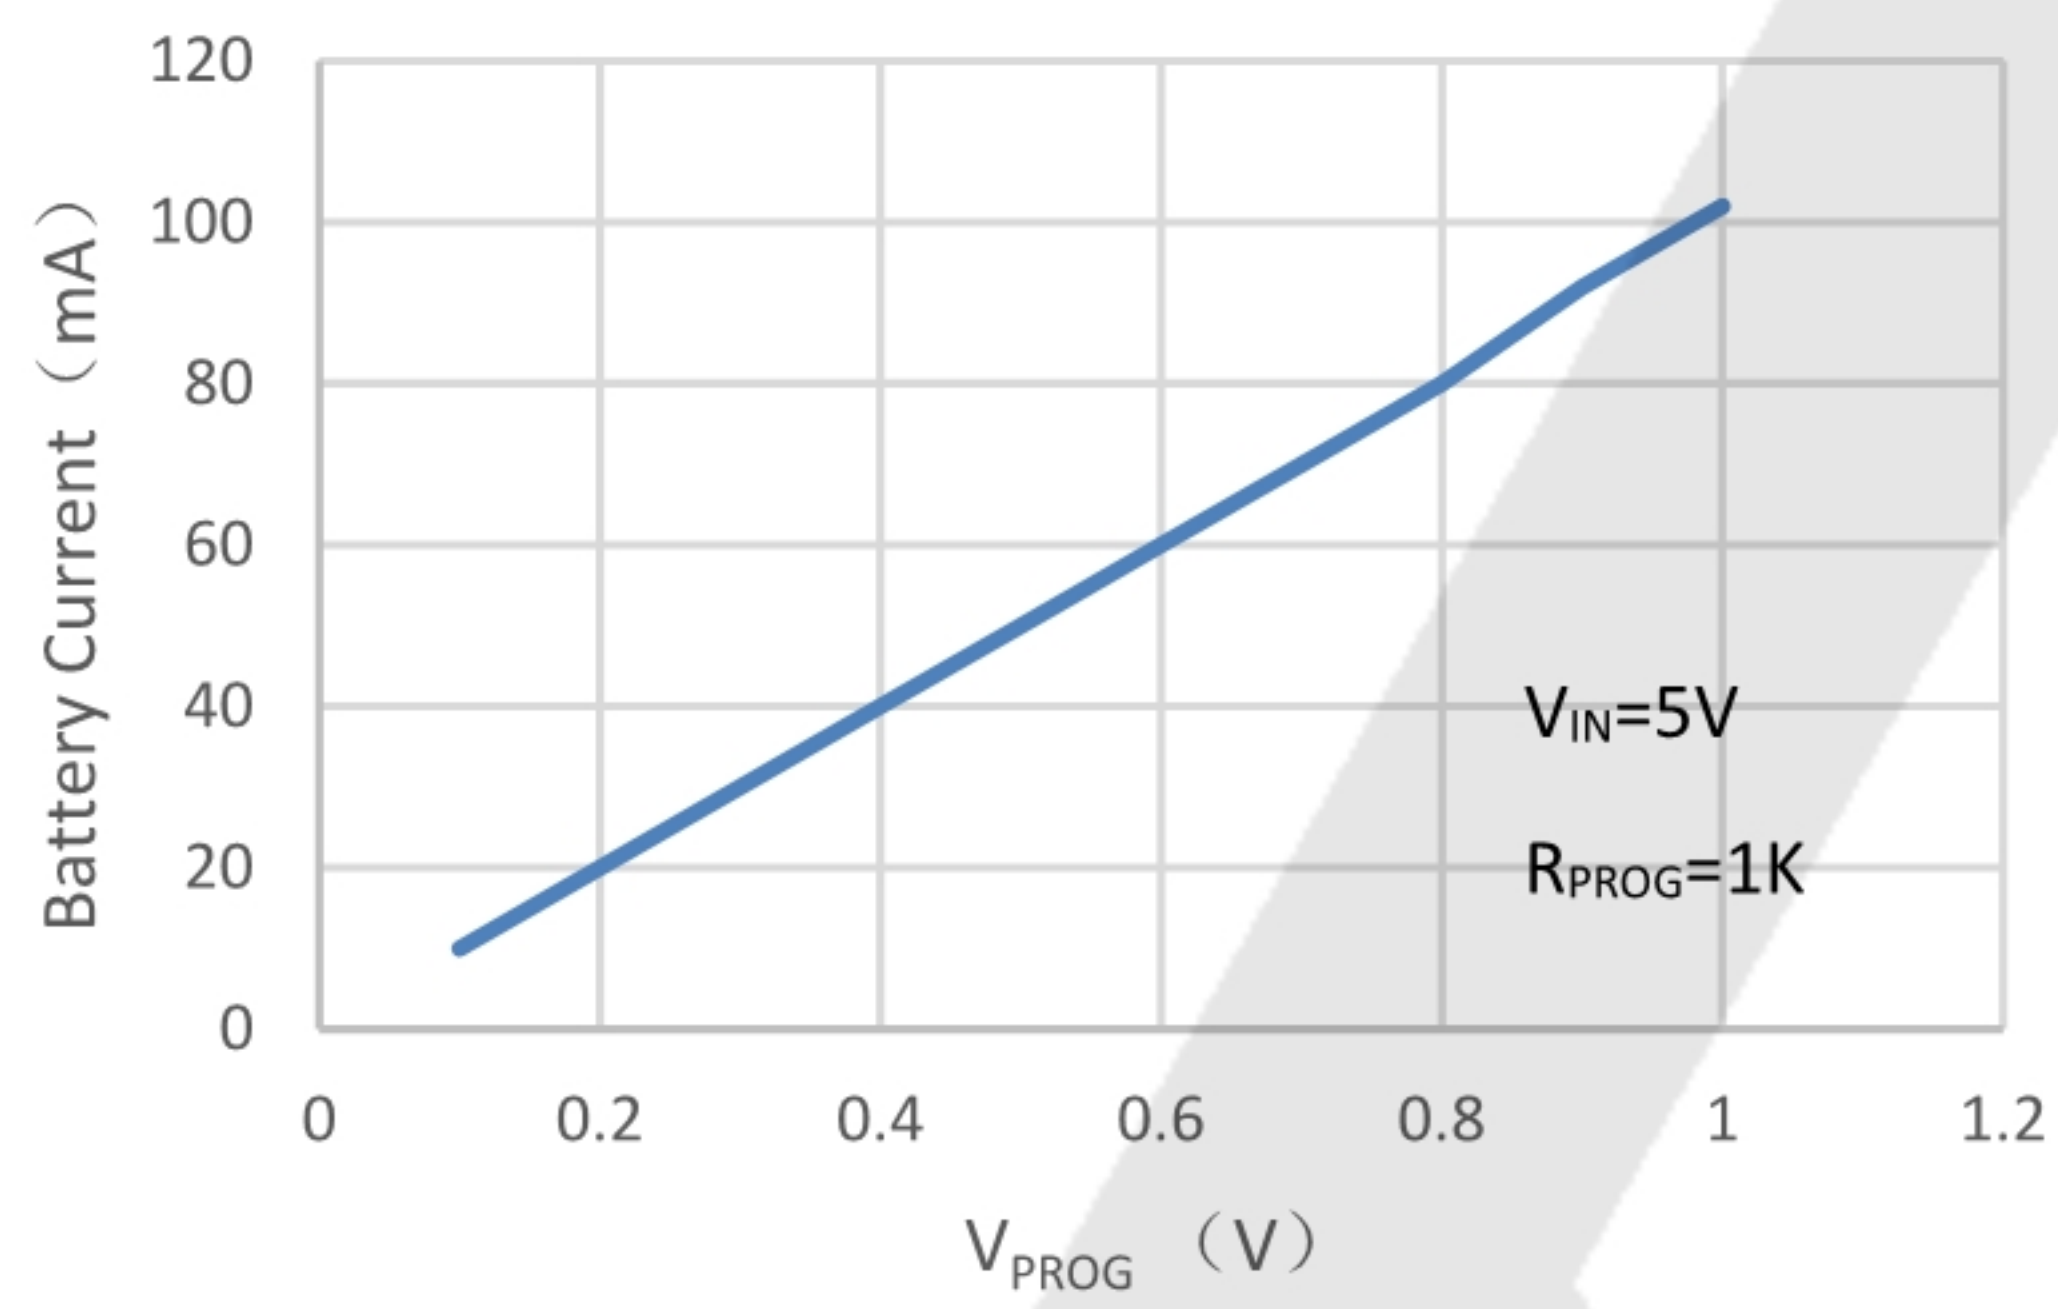


Battery Current vs. Battery Voltage

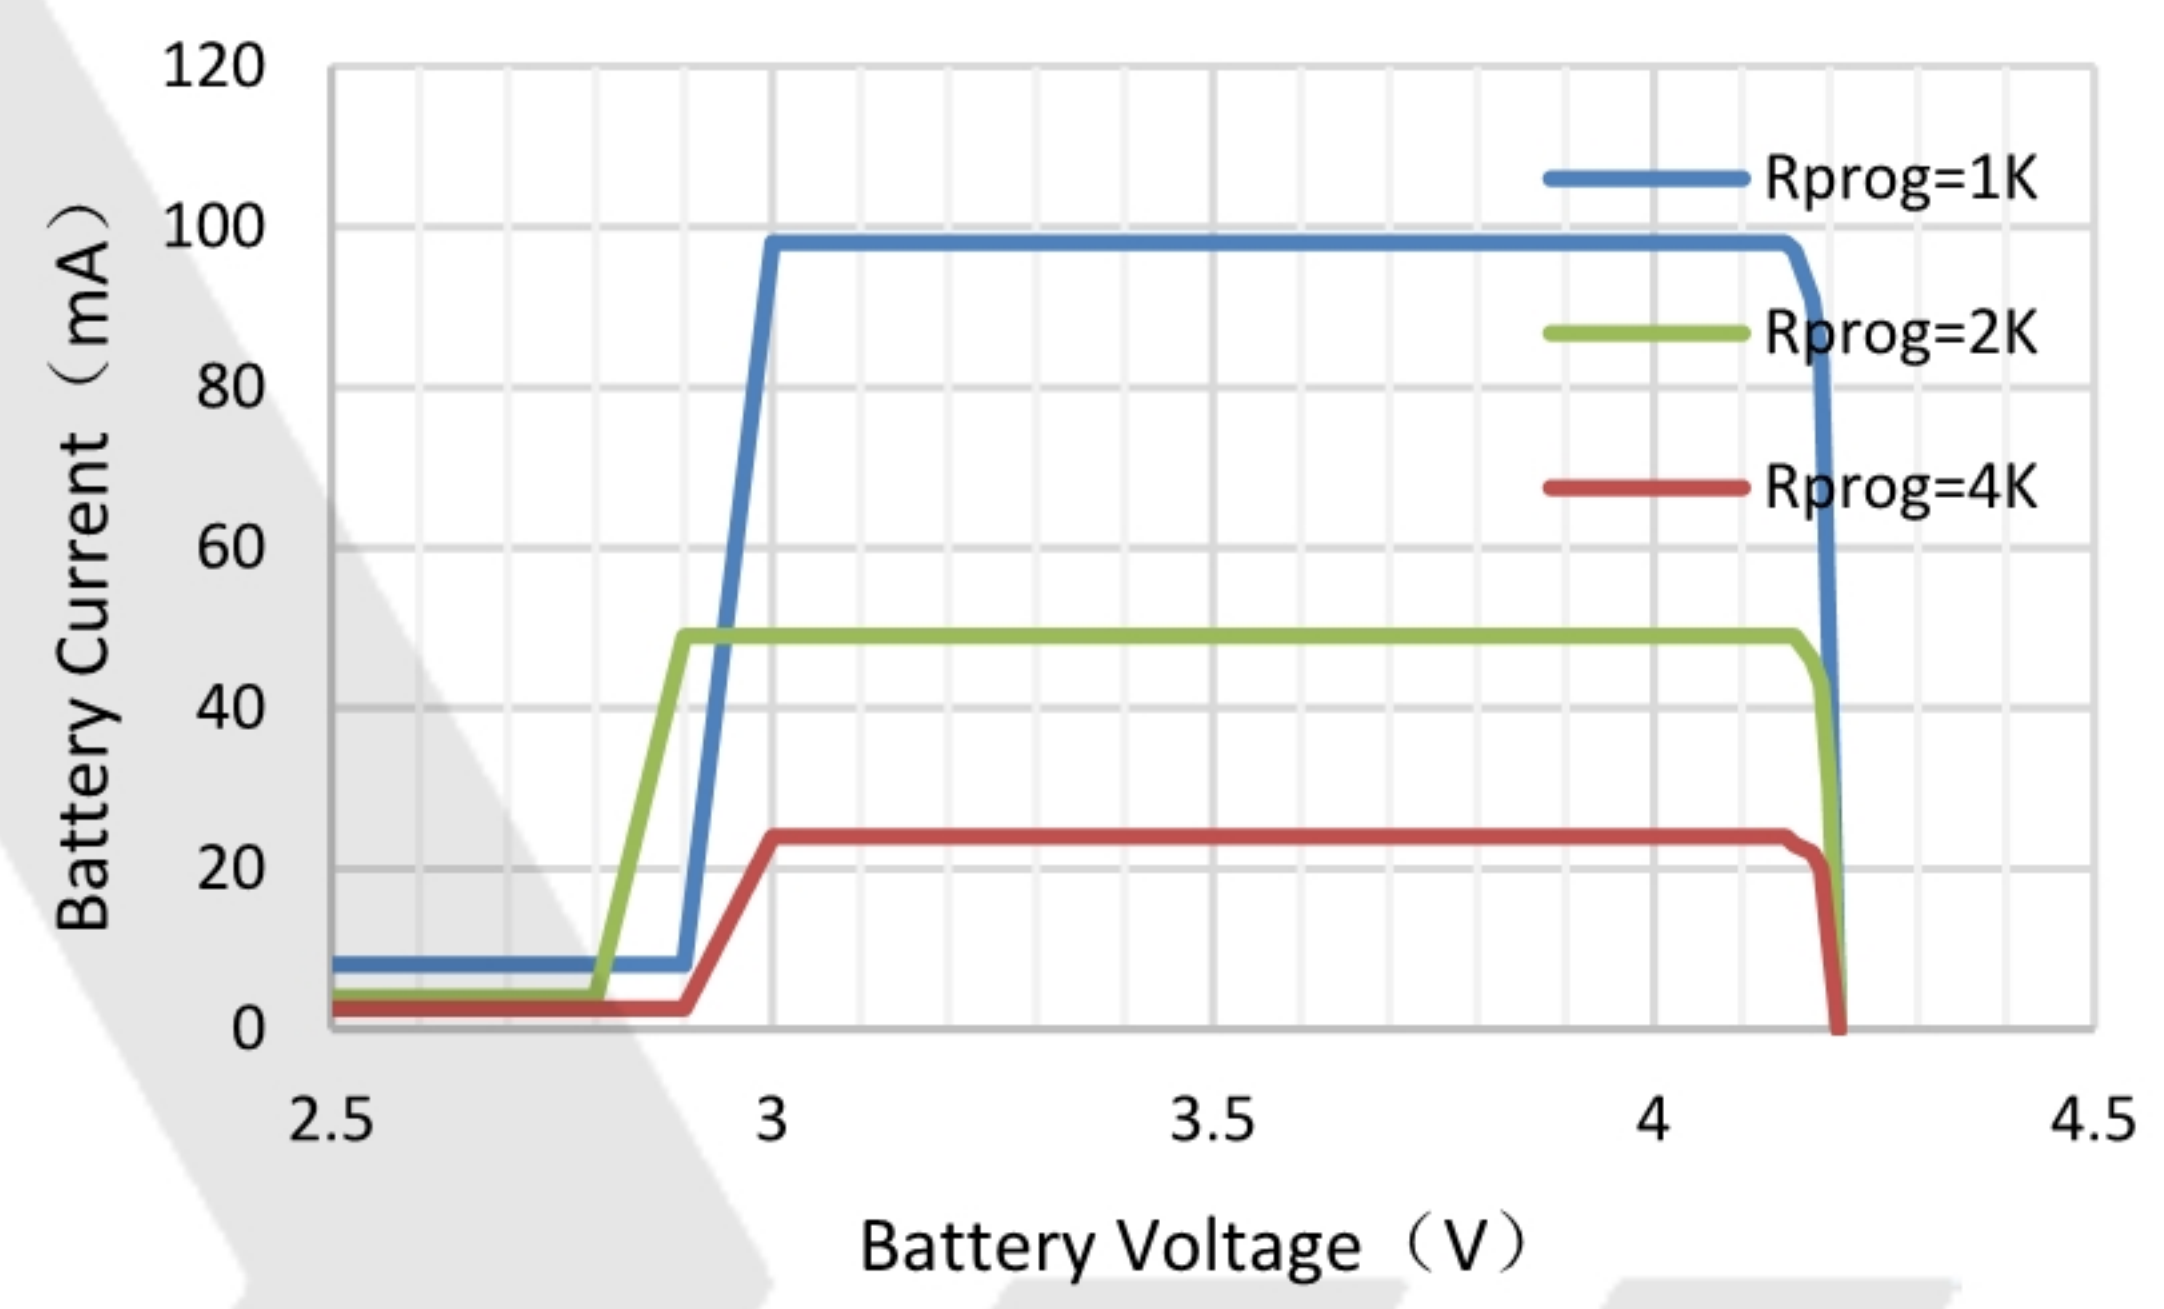


Battery Current vs. Temperature

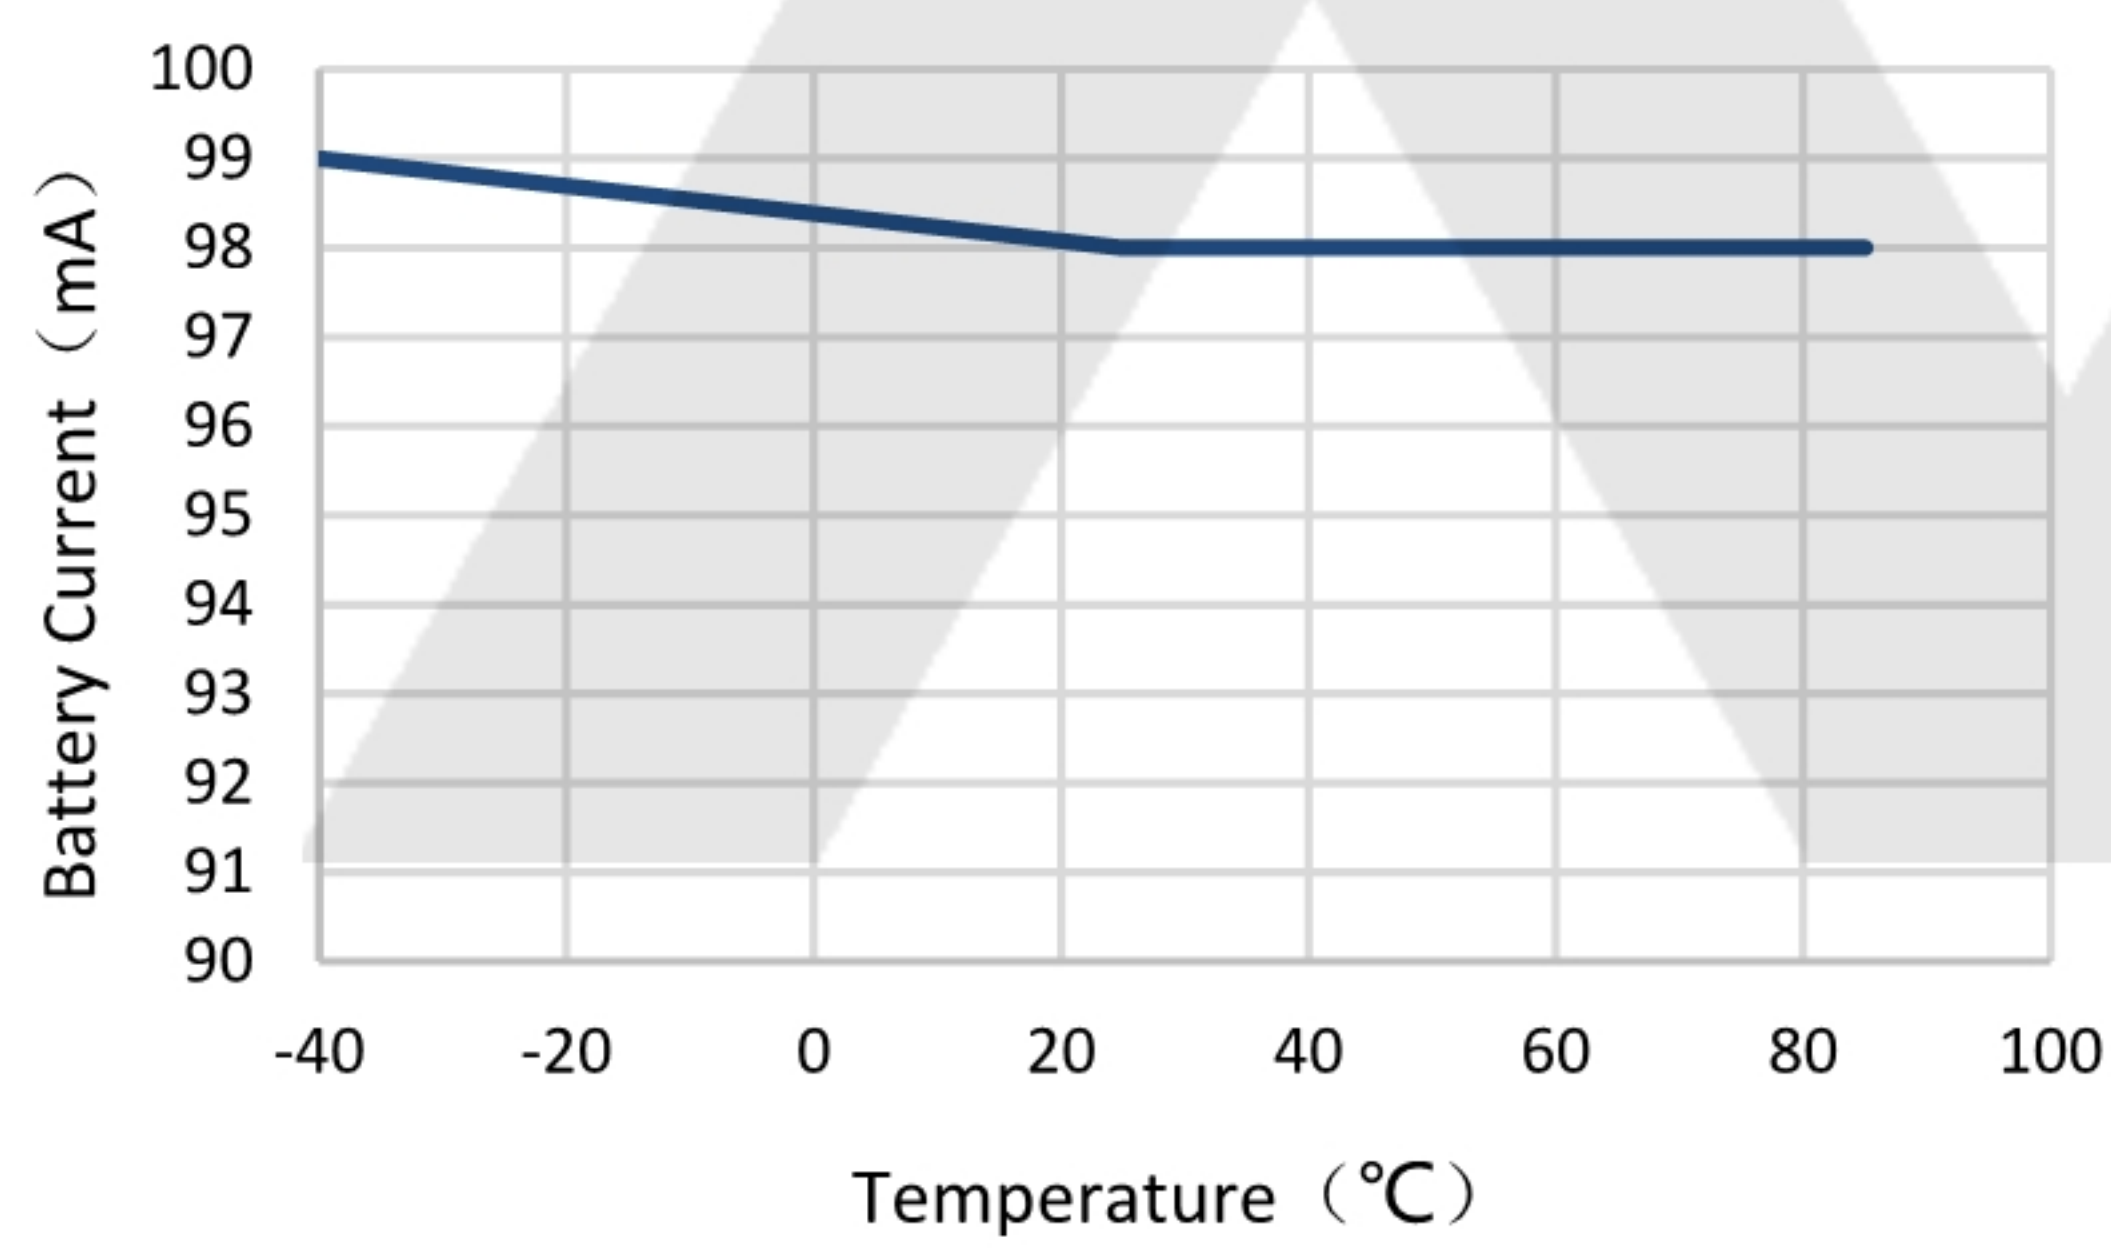


Trickle Current vs. Input Voltage

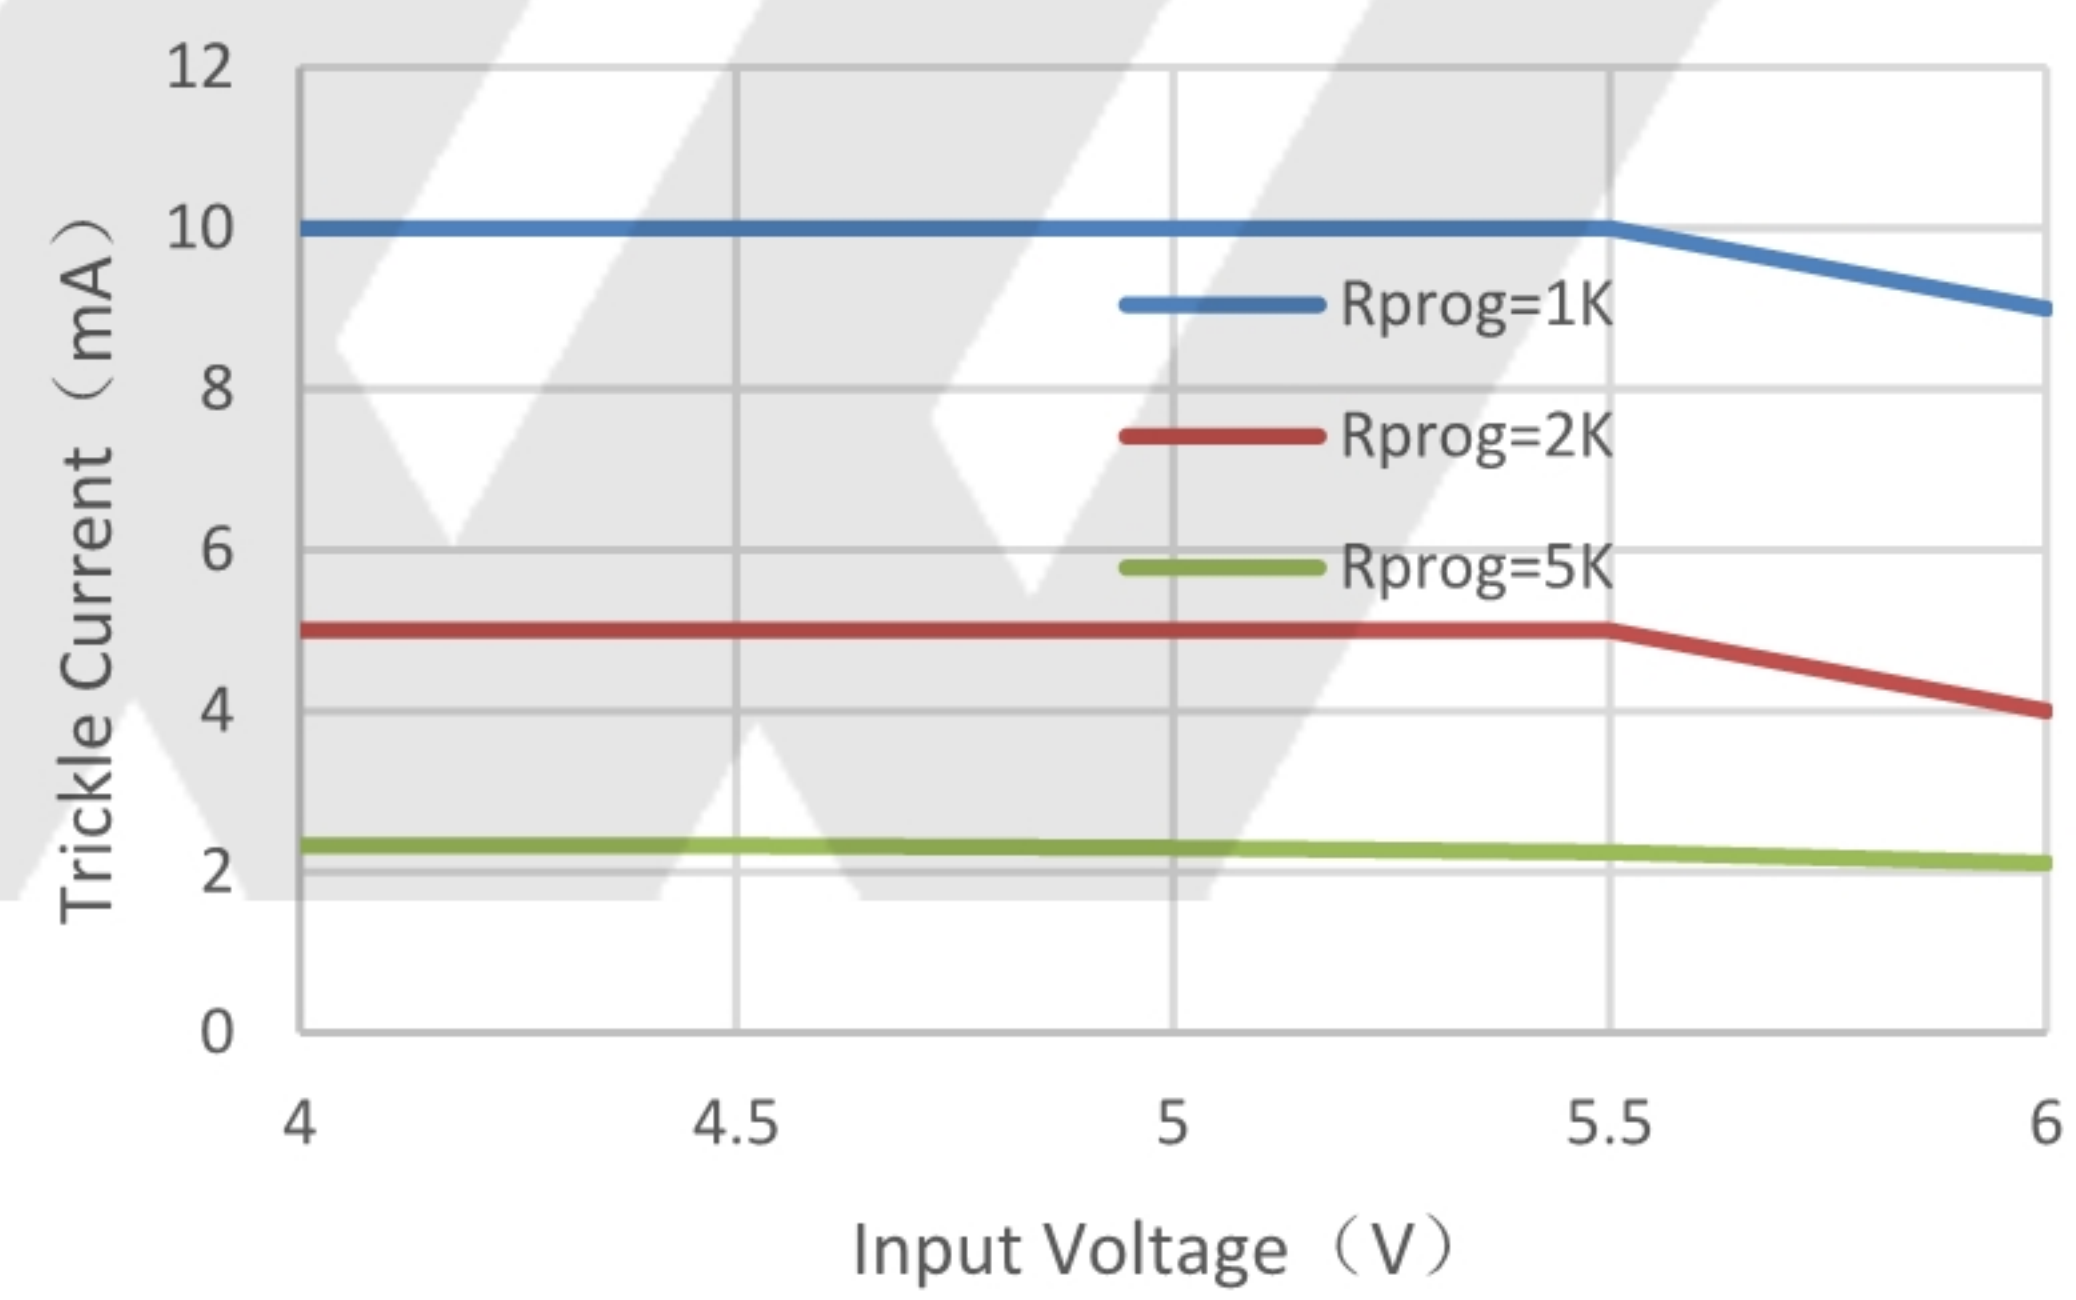


Trickle Current vs. Temperature

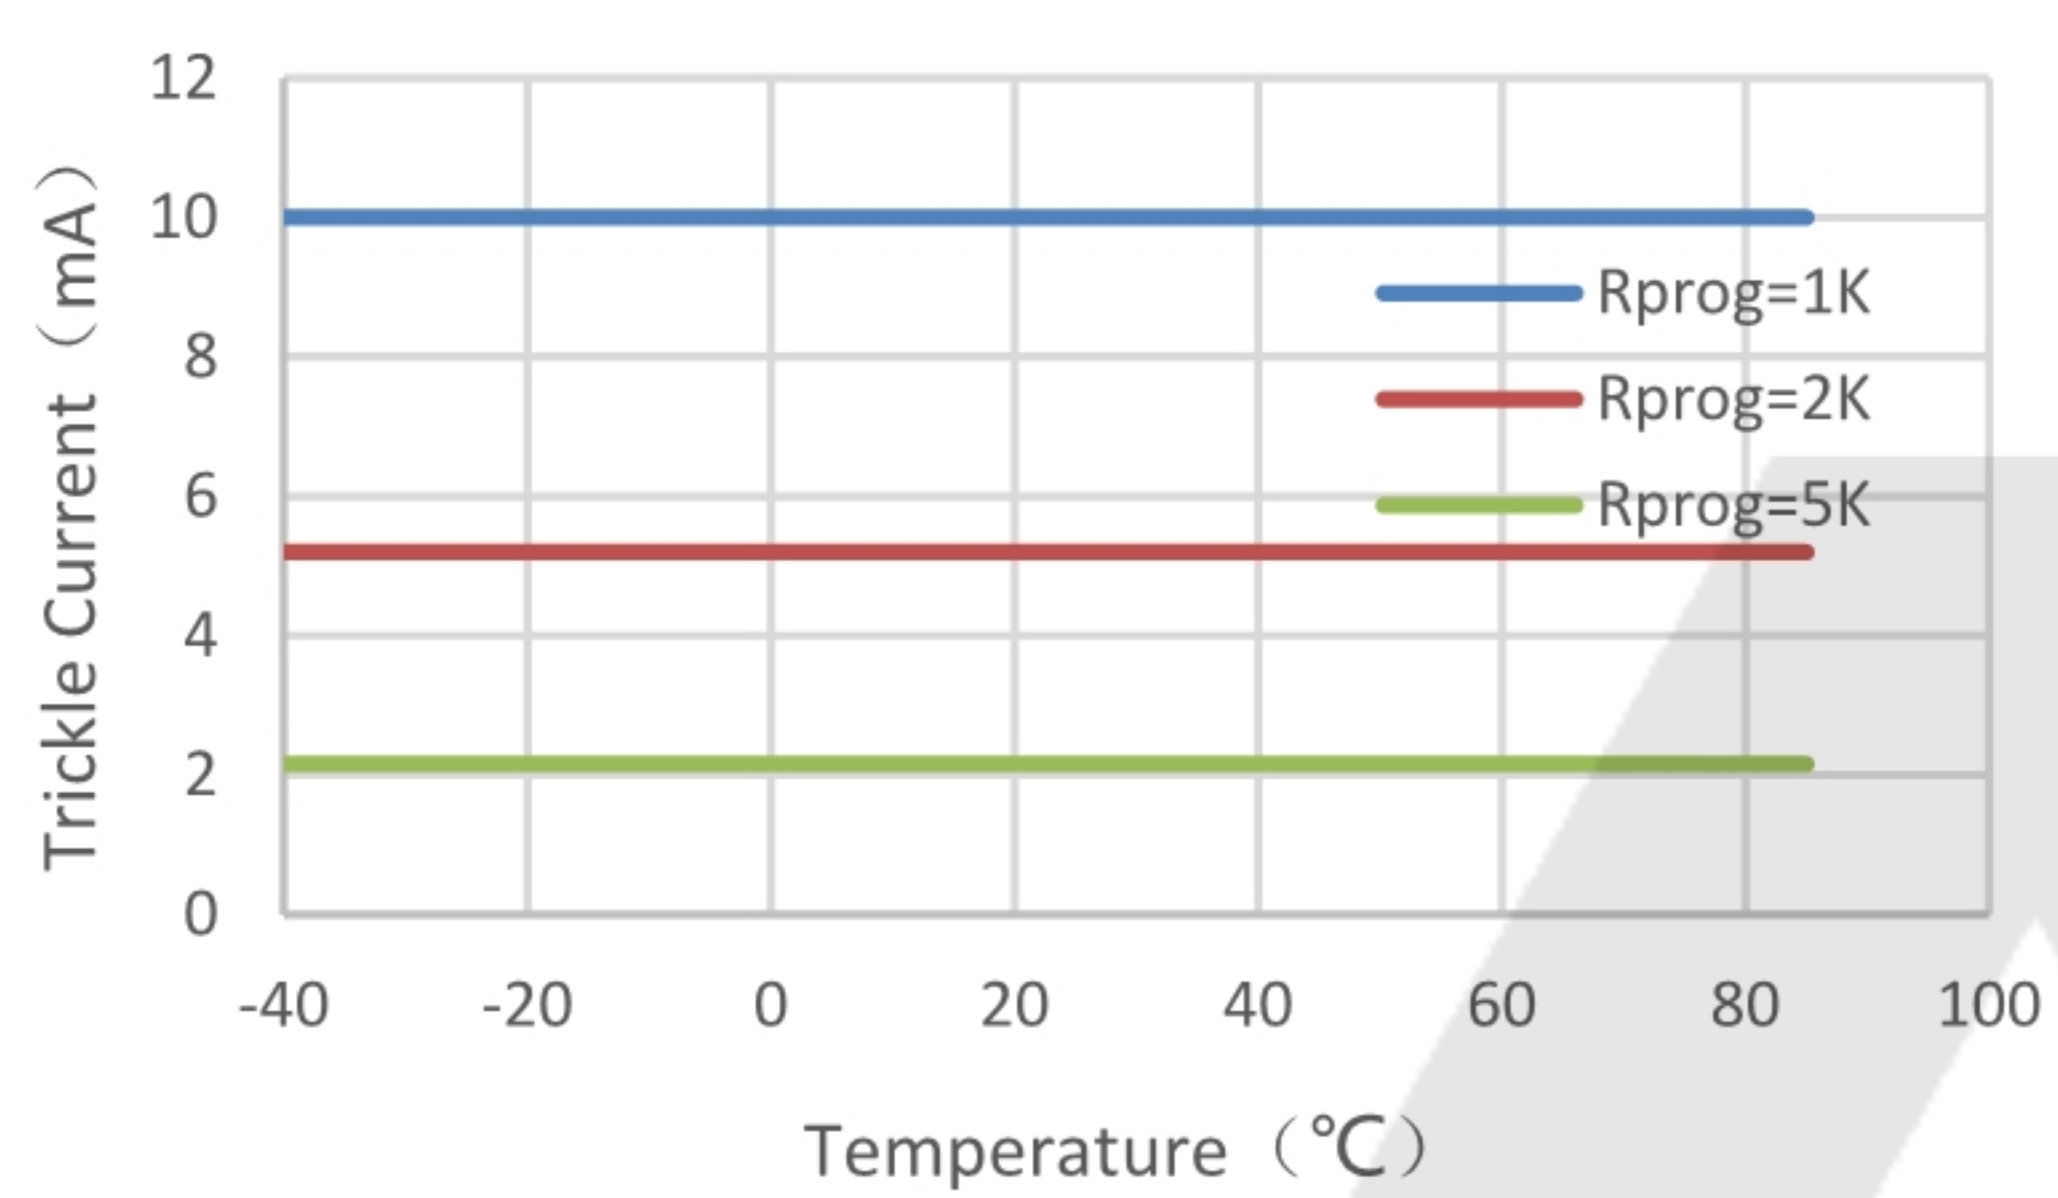


Trickle Voltage vs. Input Voltage

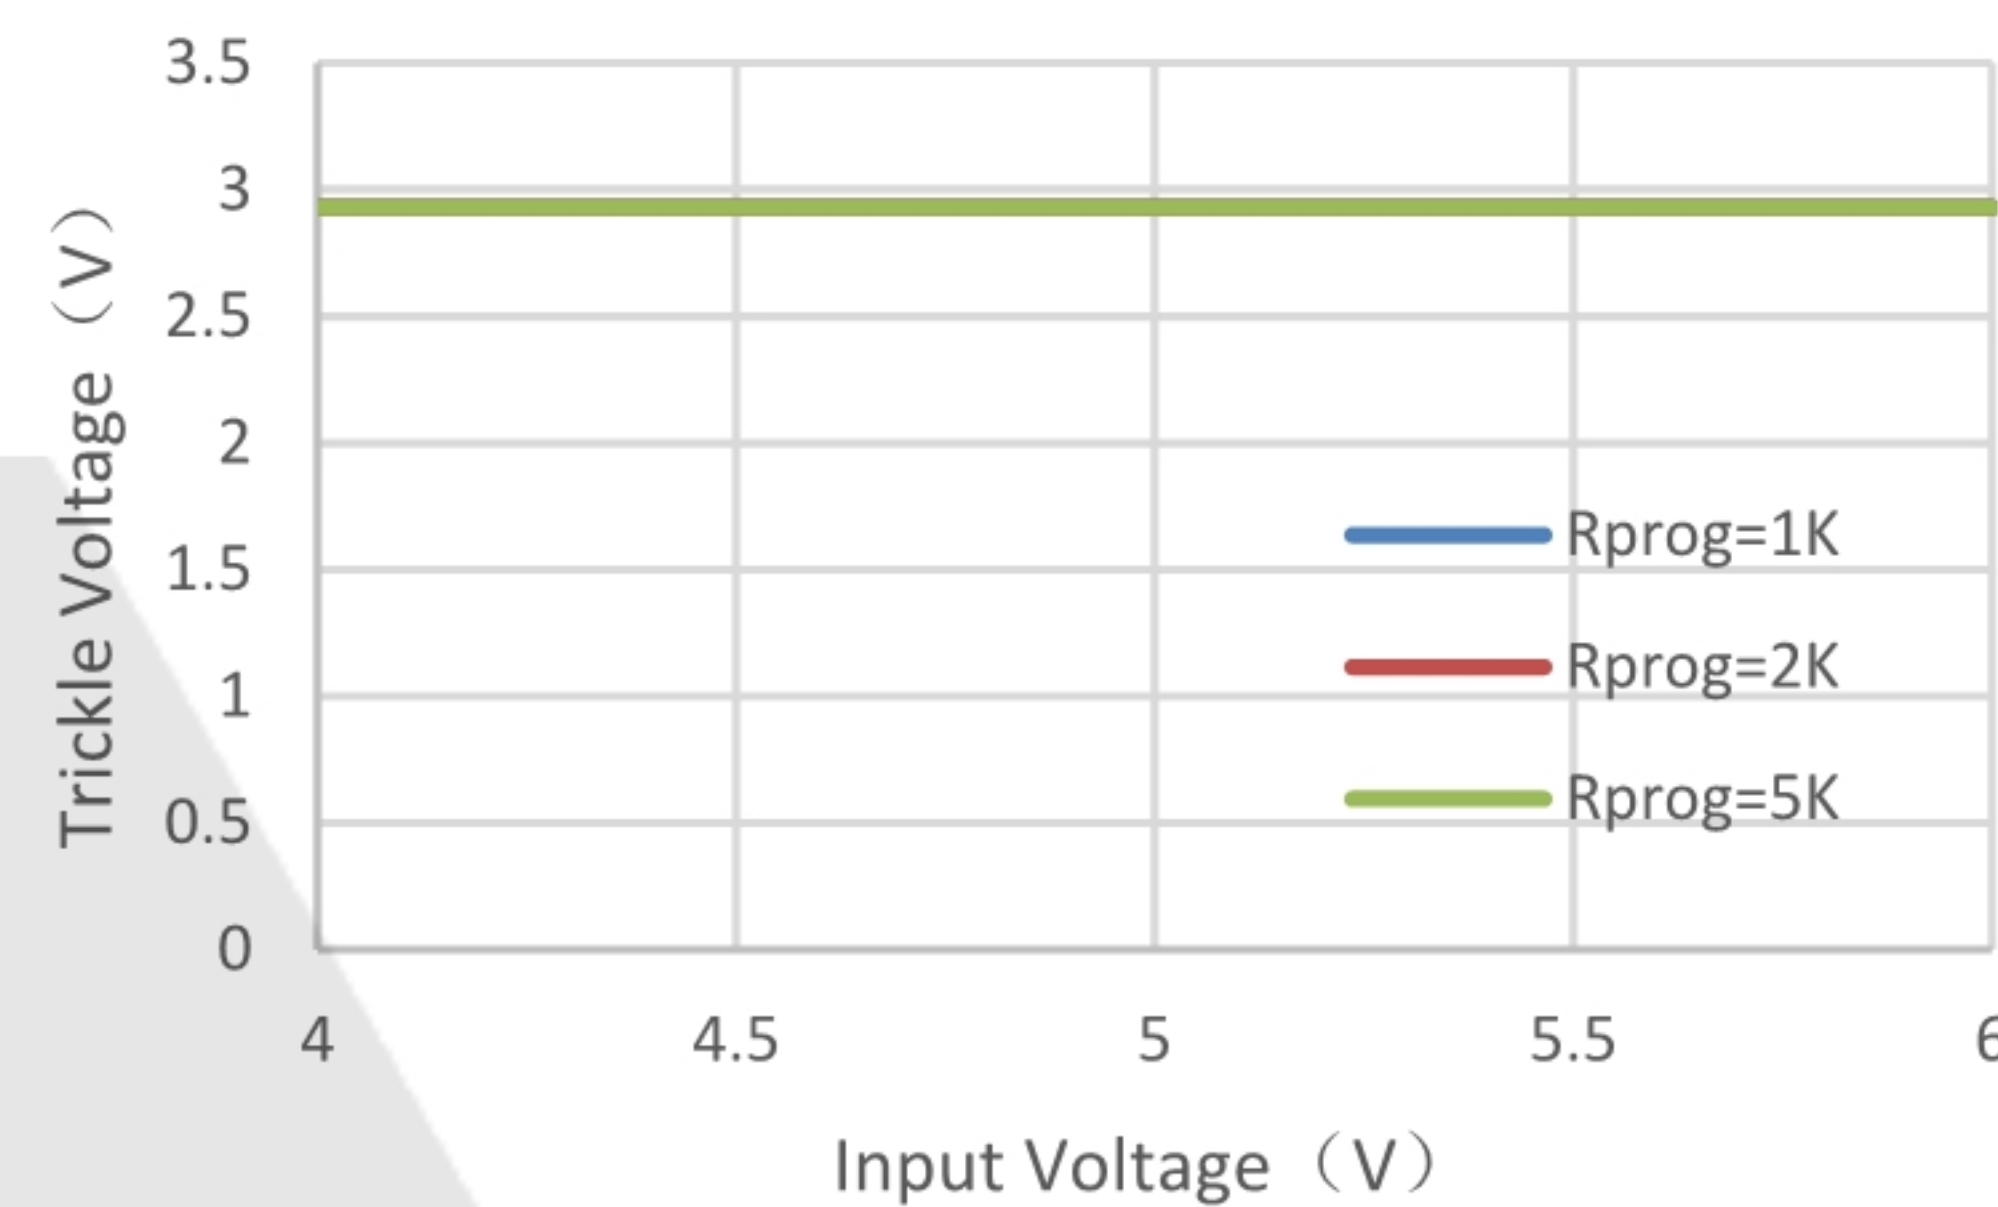


Trickle Voltage vs. Temperature

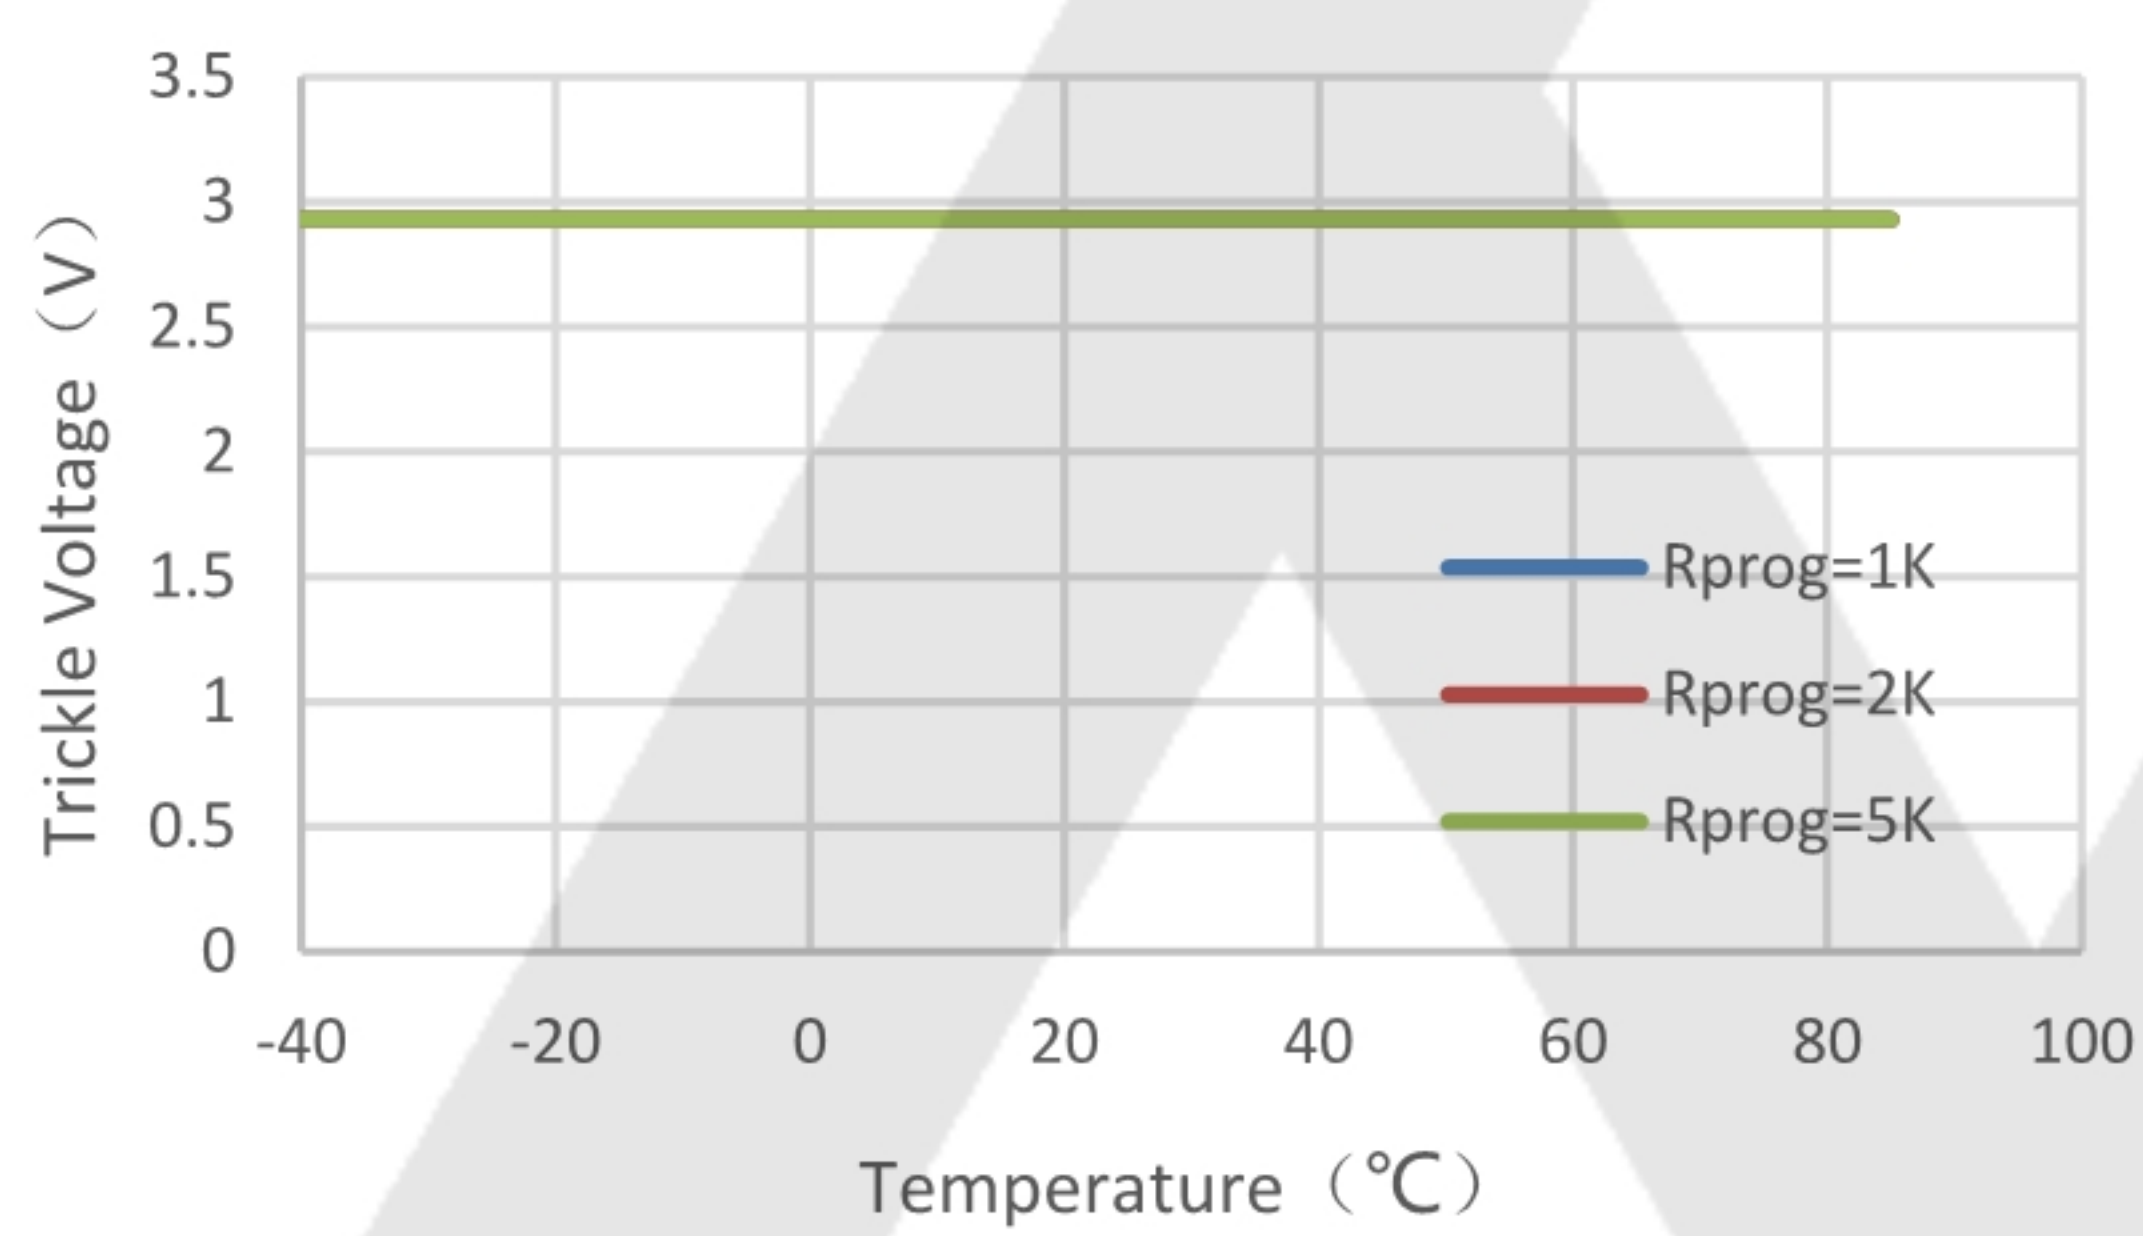

Vrecharge vs. Temperature (4.35V)

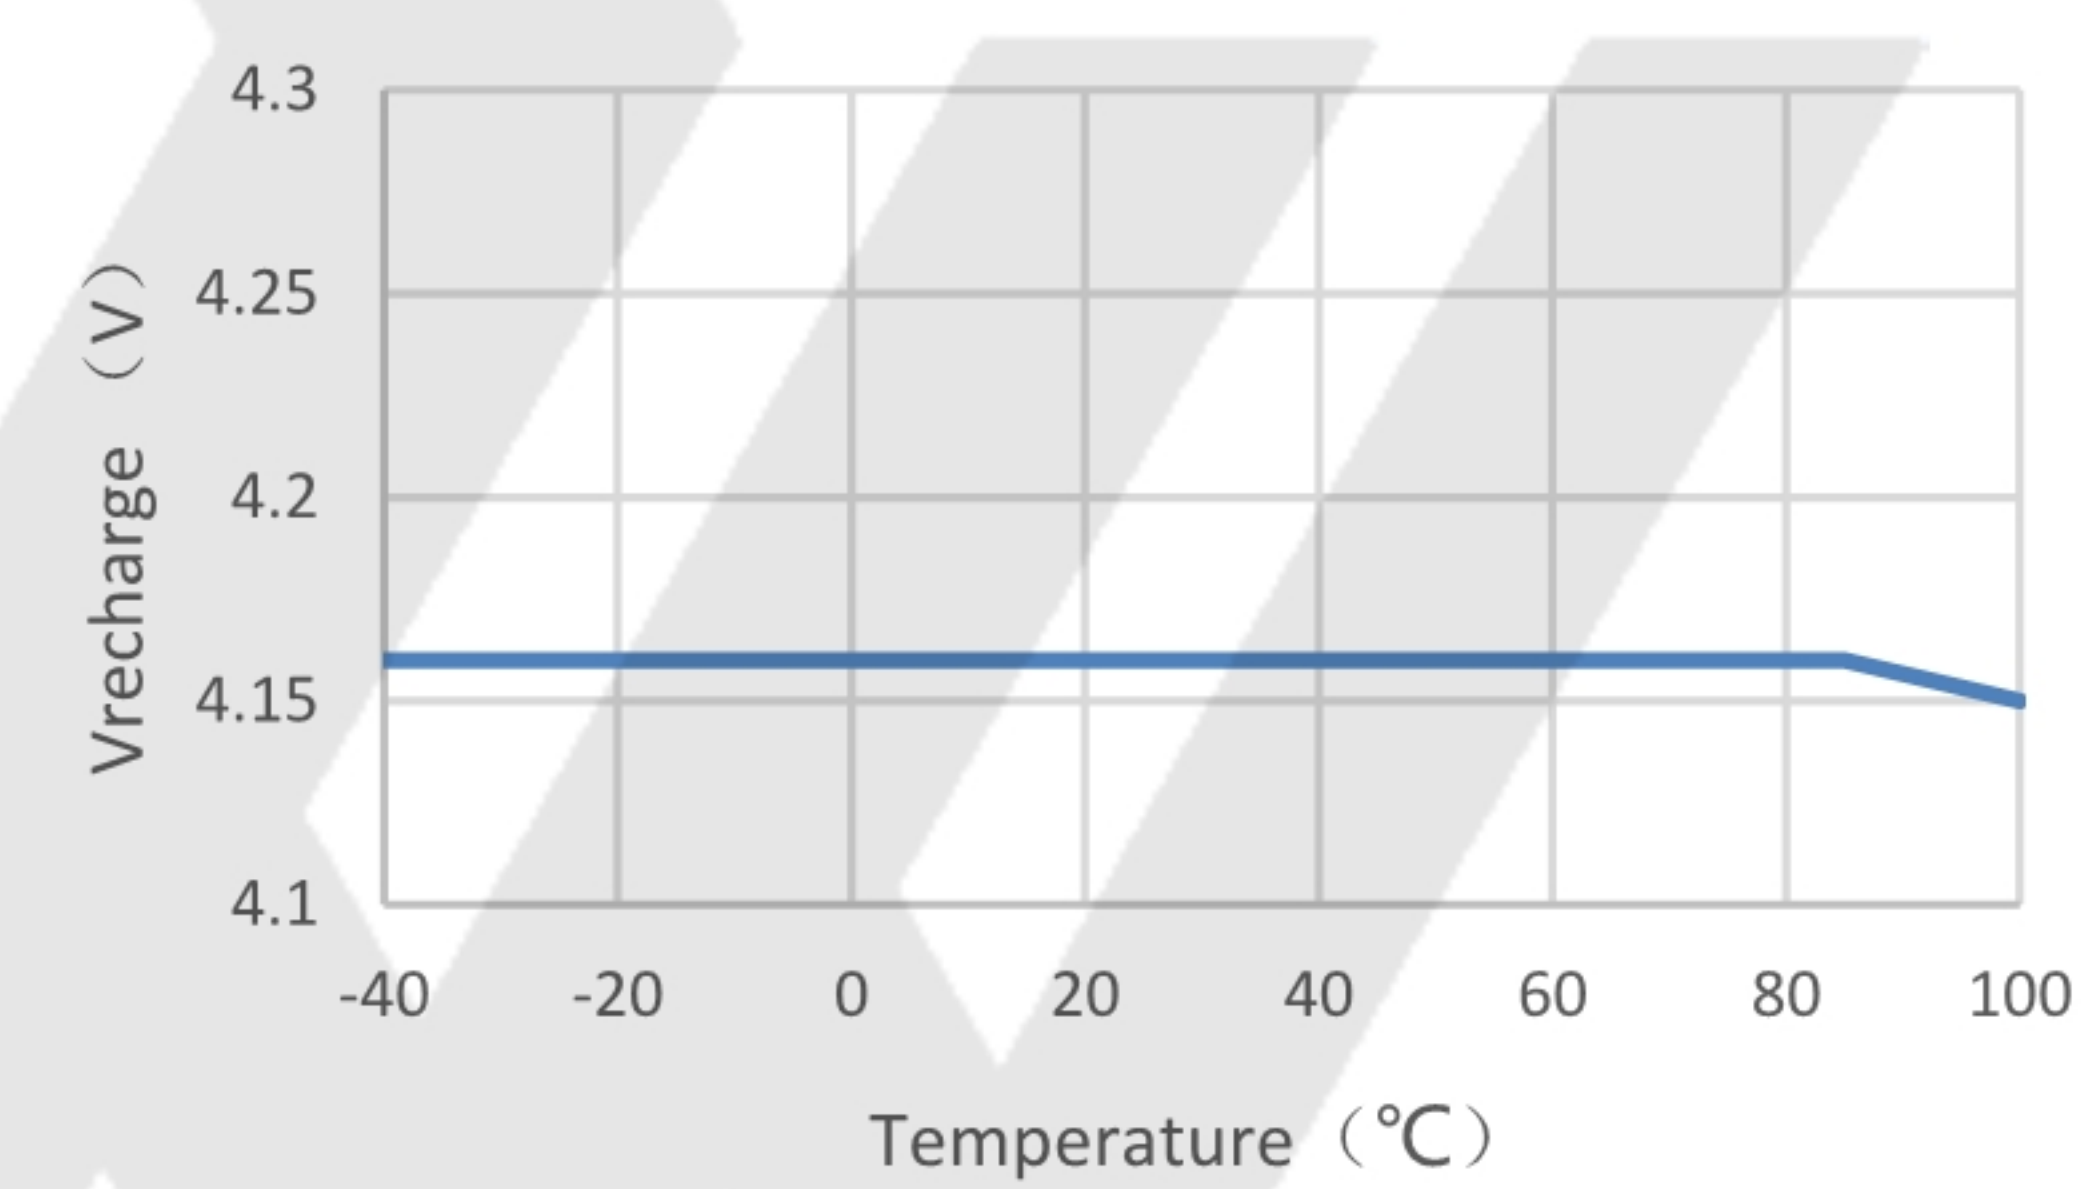



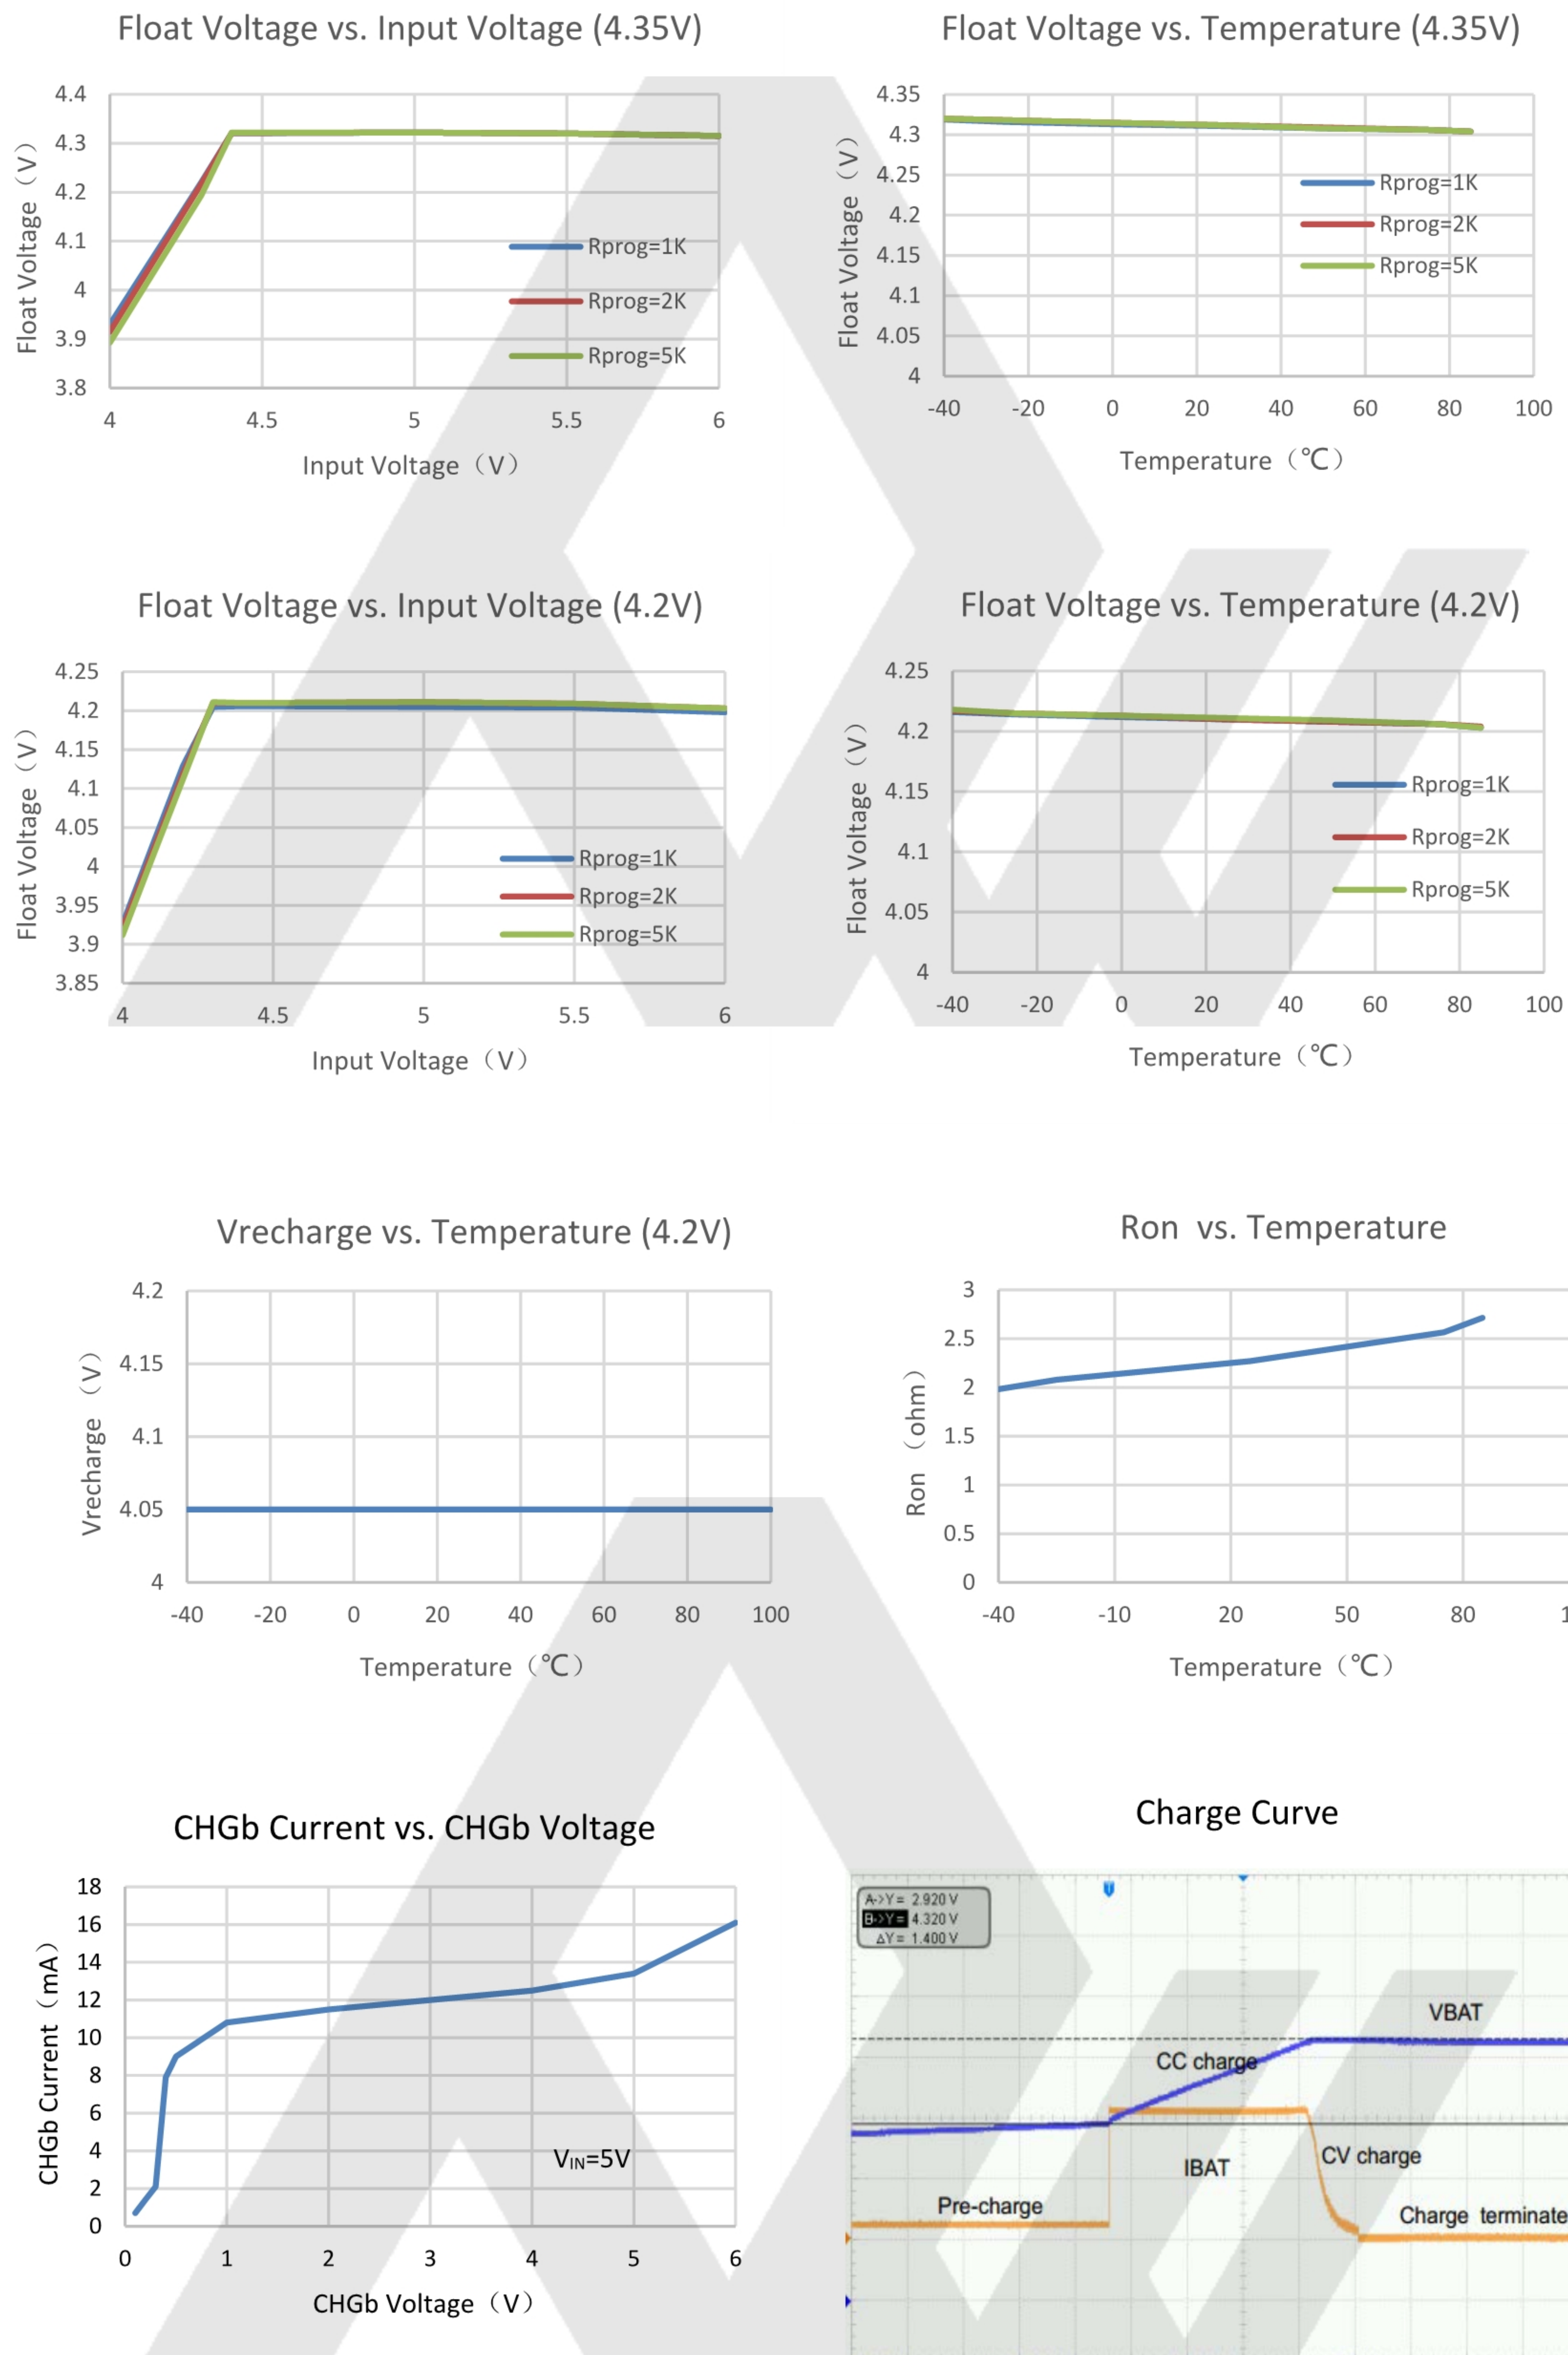



## OPERATION

The PW4556 is a single cell Li-Ion and Li-Pol battery linear charger using a constant-current / constant-voltage algorithm. It is designed specially for small capacity battery that is used in handheld devices, such as GPS tracker, Smart wrist and U-Key. It can deliver up to 300mA of charge current (using a good thermal PCB layout) with a final float voltage accuracy of  $\pm 1\%$ . The PW4556 includes an internal P-channel power MOSFET and current regulation circuitry. No blocking diode or external current sense resistor is required, thus the basic charger circuit requires only two external components. Furthermore, the PW4556 is capable of operating from a USB power source.

### Normal charge cycle

A charge cycle begins when the voltage at the VCC pin rises above the UVLO threshold level and a 1% program resistor is connected from the PROG pin to ground or when a battery is connected to the charger output. If the BAT pin is less than 2.9V, the charger enters trickle charge mode. In this mode, the PW4556 supplies approximately 1/10 the programmed charge current to bring the battery voltage up to a safe level for full current charging.

When the BAT pin voltage rises above 2.9V, the charger enters constant-current mode, where the programmed charge current is supplied to the battery. When the BAT pin approaches the final float voltage, the PW4556 enters constant-voltage mode and the charge current begins to decrease. The charge cycle ends when the PROG voltage is less than 100mV.

### Programming charge current

The charge current is programmed using a single resistor from the PROG pin to ground. The battery charge current of constant current mode is 100 times the current out of the PROG pin. The program resistor and the charge current of constant current are calculated using the following equations:

$$\frac{100}{R_{PROG}} (A) = I_{BAT}$$

For example,  $I_{BAT}=0.1A$ ,  $R_{PROG}=1K\Omega$ ,  $I_{BAT}=0.02A$ ,  $R_{PROG}=5K\Omega$ . Please choose 1% precision resistor for  $R_{PROG}$ , this will effect the accuracy of CC charge current and termination current.

### Charge termination


A charge cycle is terminated when the charge current falls to 1/10 of the programmed value after the final float voltage is reached. This condition is detected by using an internal, filtered comparator to monitor the PROG pin. When the PROG pin voltage falls below 100mV for longer than TTERM (typically 1ms), charging is terminated. The charge current is latched off and the PW4556 enters standby mode, where the input supply current drops to 70uA. (Note: 1/10 CC termination is disabled in trickle charging mode).

When charging, transient loads on the BAT pin can cause the PROG pin to fall below 100mV for short periods of time before the DC charge current has dropped to 1/10 of the programmed value. The 1ms filter time (TTERM) on the termination comparator ensures that transient loads of this nature do not result in premature charge cycle termination. Once the average charge current drops below



1/10 of the programmed value, the PW4556 terminates the charge cycle and ceases to provide any current through the BAT pin, the chip will be put into standby mode. In this state, all loads on the BAT pin must be supplied by the battery.

The PW4556 constantly monitors the BAT pin voltage in standby mode. If this voltage drops below the  $V_{float}-0.15V$  (typically) recharge threshold (VRECHRG), another charge cycle begins and current is once again supplied to the battery. The state diagram of a typical charge cycle is as below:

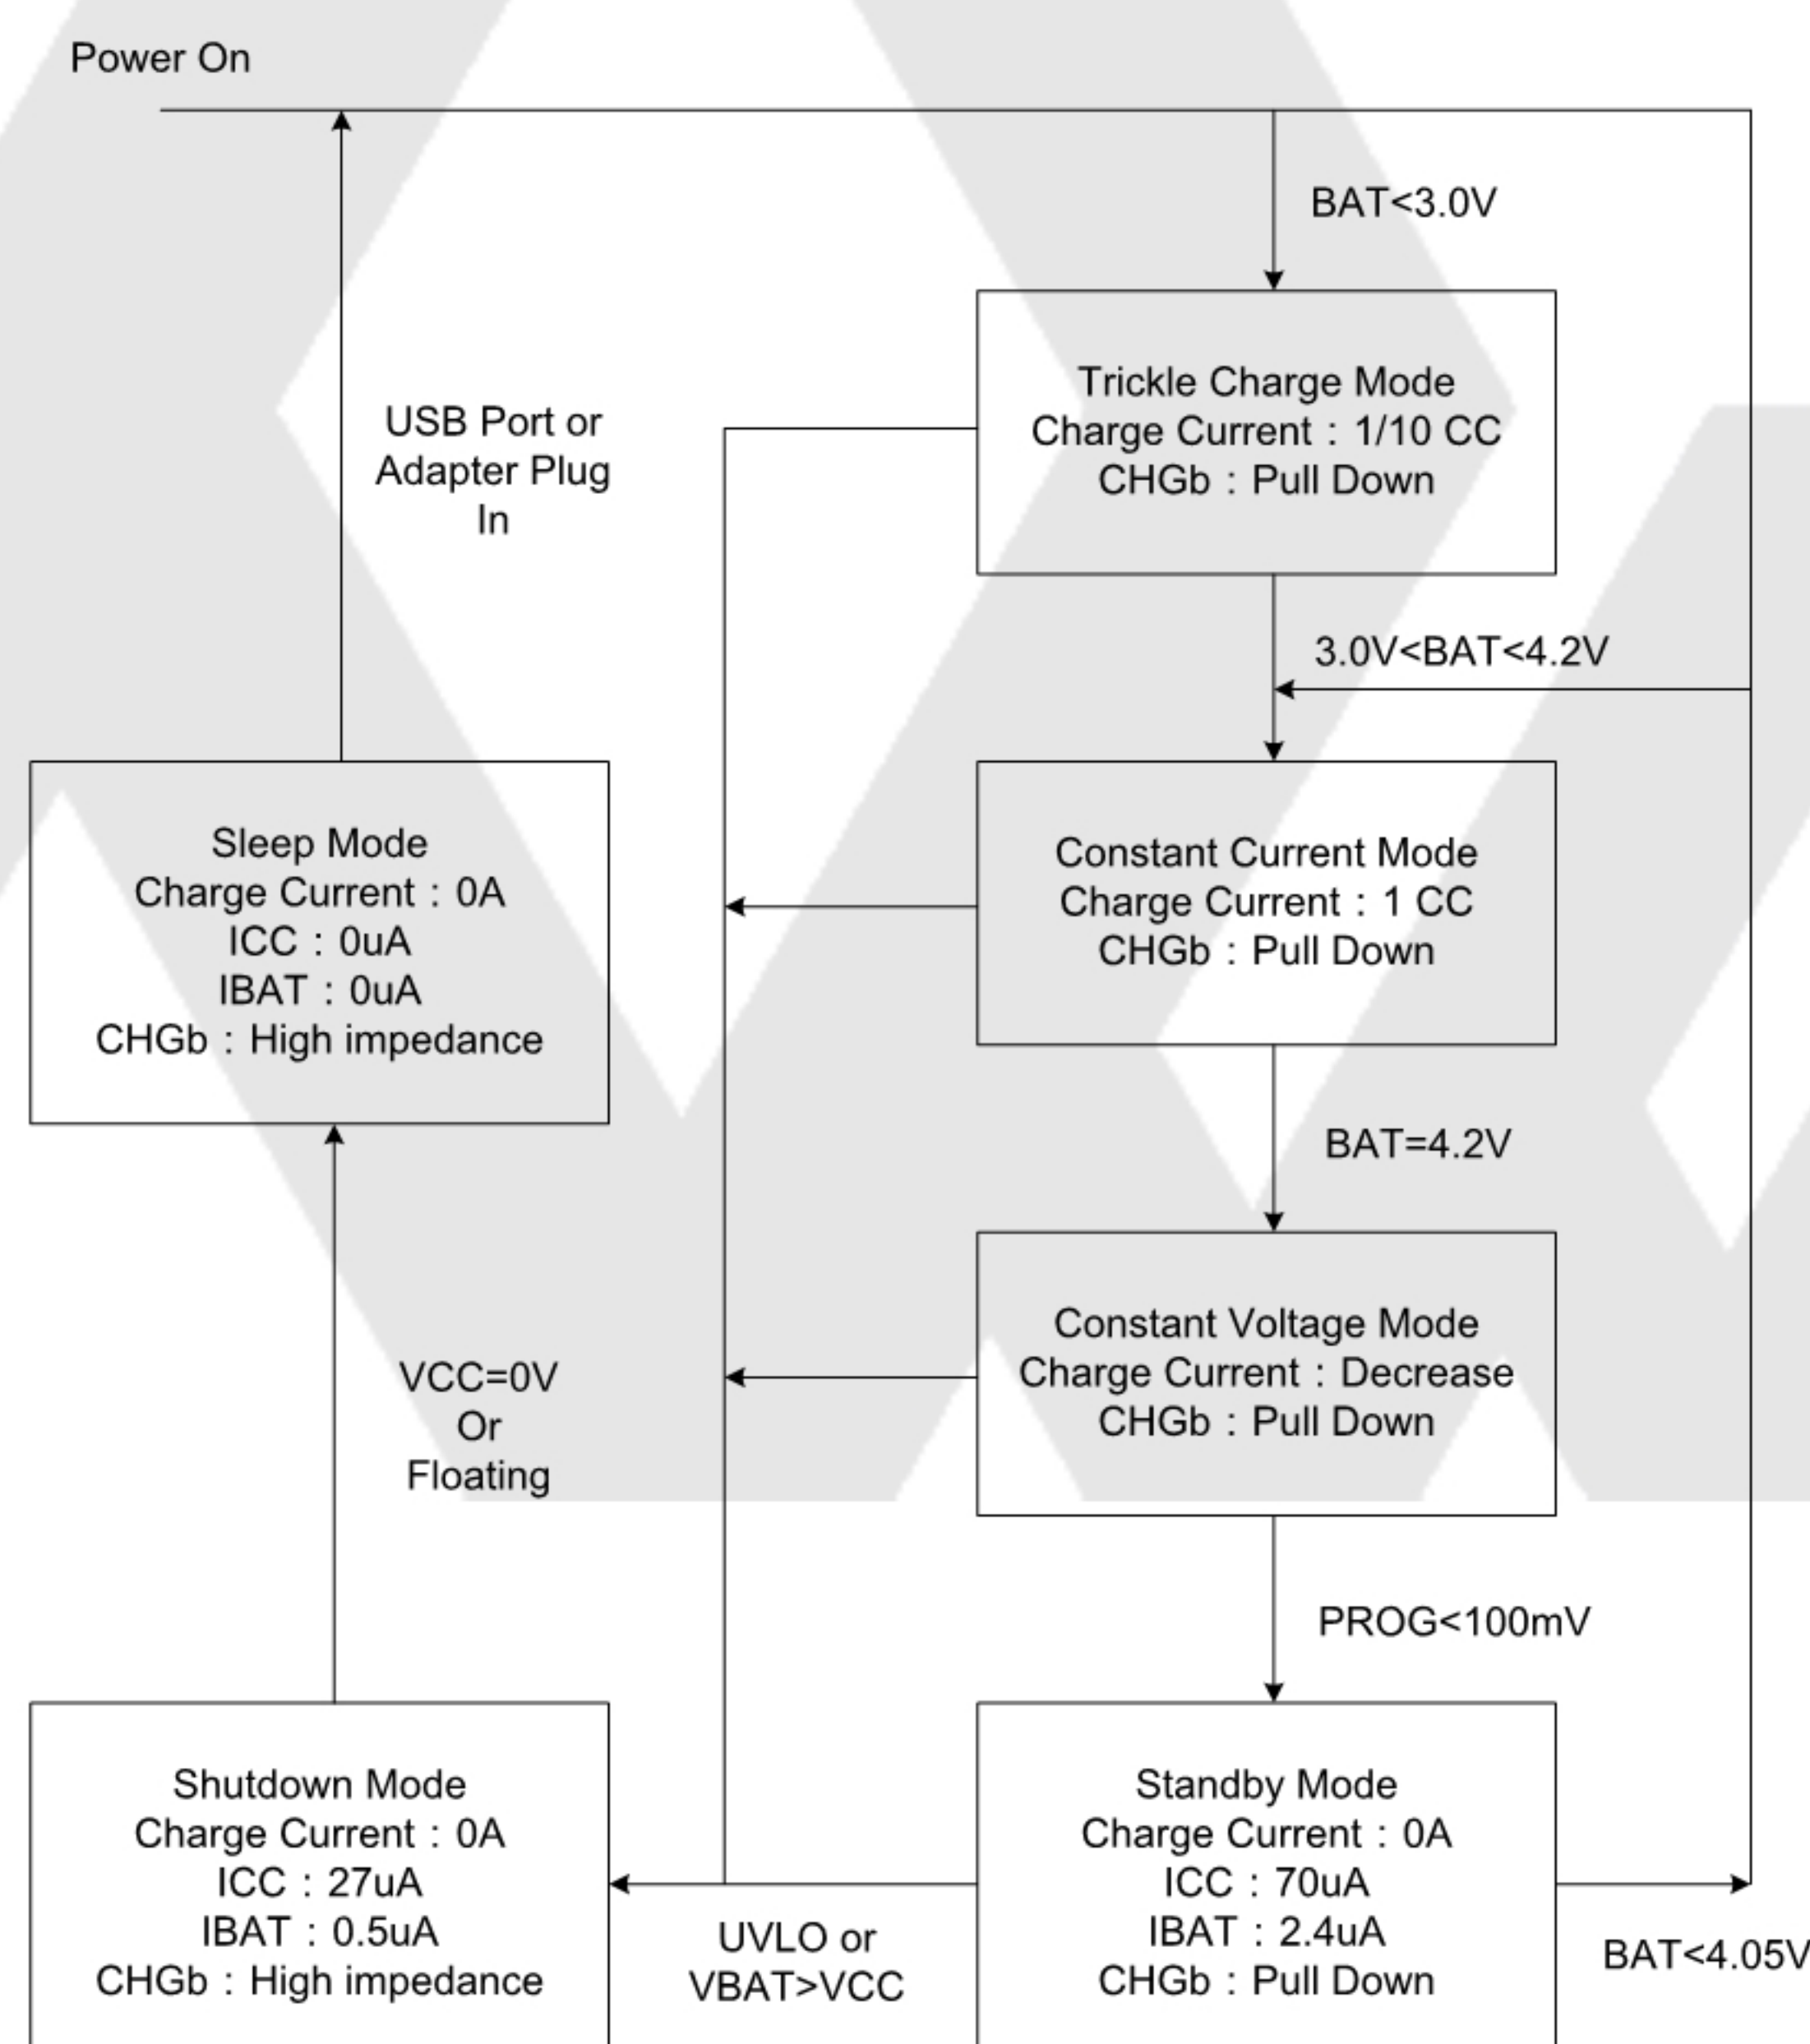

### Charge status indicator (CHGB)

The charge status output indicator is an open drain circuit. The indicator has two different states: pulldown (~16mA), and high impedance. The pull-down state indicates that the PW4556 is in a charge cycle. High impedance indicates that the charge cycle is complete. The CHGB also can be used to detect the charge states by a microprocessor with a pull-up resistor.

## Shutdown mode

The PW4556 will be put into shutdown mode when the battery voltage is higher than the VCC voltage or  $VCC - VBAT$  is less than VASD. This reduces the battery drain current to less than 0.5uA and the supply current to less than 27uA. A new charge cycle can be initiated when the  $VCC - VBAT$  is high than VASD.

The PW4556 also be put into shutdown mode when VCC voltage down to UVLO threshold. In this state, the CHGB pin is high impedance state. The CHGB pin is also in a high impedance state if the charge cycle is completed.

## Automatic recharge

Once the charge cycle is terminated, the PW4556 continuously monitors the voltage on the BAT pin using a comparator with a 2ms filter time ( $T_{RECHRG}$ ). A charge cycle restarts when the battery voltage falls below  $\Delta V_{RECHRG}$  (which corresponds to approximately 80% to 90% battery capacity). This



ensures that the battery is kept at or near a fully charged condition and eliminates the need for periodic charge cycle initiations. CHGB output enters a pull-down state during recharge cycles.

### Stability considerations

The constant-voltage mode feedback loop is stable without an output capacitor provided a battery is connected to the charge output. With no battery present, an output capacitor is recommended to reduce ripple voltage.

In constant-current mode, the PROG pin is in the feedback loop, not the battery. The constant-current mode stability is affected by the impedance at the PROG pin. With no additional capacitance on the PROG pin, the charger is stable with program resistor values as high as 100KΩ. However, additional capacitance on this node reduces the maximum allowed program resistor thus it should be avoided.

### Power dissipation

PW4556 has low temperature coefficient, at higher temperatures, the charging current will decrease slightly. To -40 °C ~125 °C temperature range the change of the charging current is very small. Nearly all of this power dissipation is generated by the internal MOSFET. This is calculated to be approximately:

$$P_D = (V_{CC} - V_{BAT}) * I_{BAT}$$

Maximum allowable power dissipation limited by the packaging format and cooling conditions in actual applications. For TDFN1X1-6L package, PD is not allowed to exceed 0.3W. For example, the worse case application of PW4556 is VCC=5.5V, VBAT=3V, IBAT=0.1A, so PD=0.25W, it is safe. At charge cycle, the battery voltage is rising gradually, so the power dissipation is reduce accordingly. The power dissipation turn into heat, please taken into consideration when design system.

### VCC bypass capacitor

Many types of capacitors can be used for input bypass, however, caution must be exercised when using multilayer ceramic capacitors. Because of the selfresonant and high Q characteristics of some types of ceramic capacitors, a 10uF/16V ceramic capacitor is recommended for this bypass capacitor. Due to a high voltage transient will be generated under some startup conditions, such as connecting the charger input to a live power source.


### Charge current soft-start

The PW4556 includes a soft-start circuit to minimize the inrush current at the start of a charge cycle. When a charge cycle is initiated, the charge current ramps from zero to the full-scale current over a period of approximately 190us. This has the effect of minimizing the transient current load on the power supply during start-up.



## PACKAGE DESCRIPTION

### TDFN1X1-6L

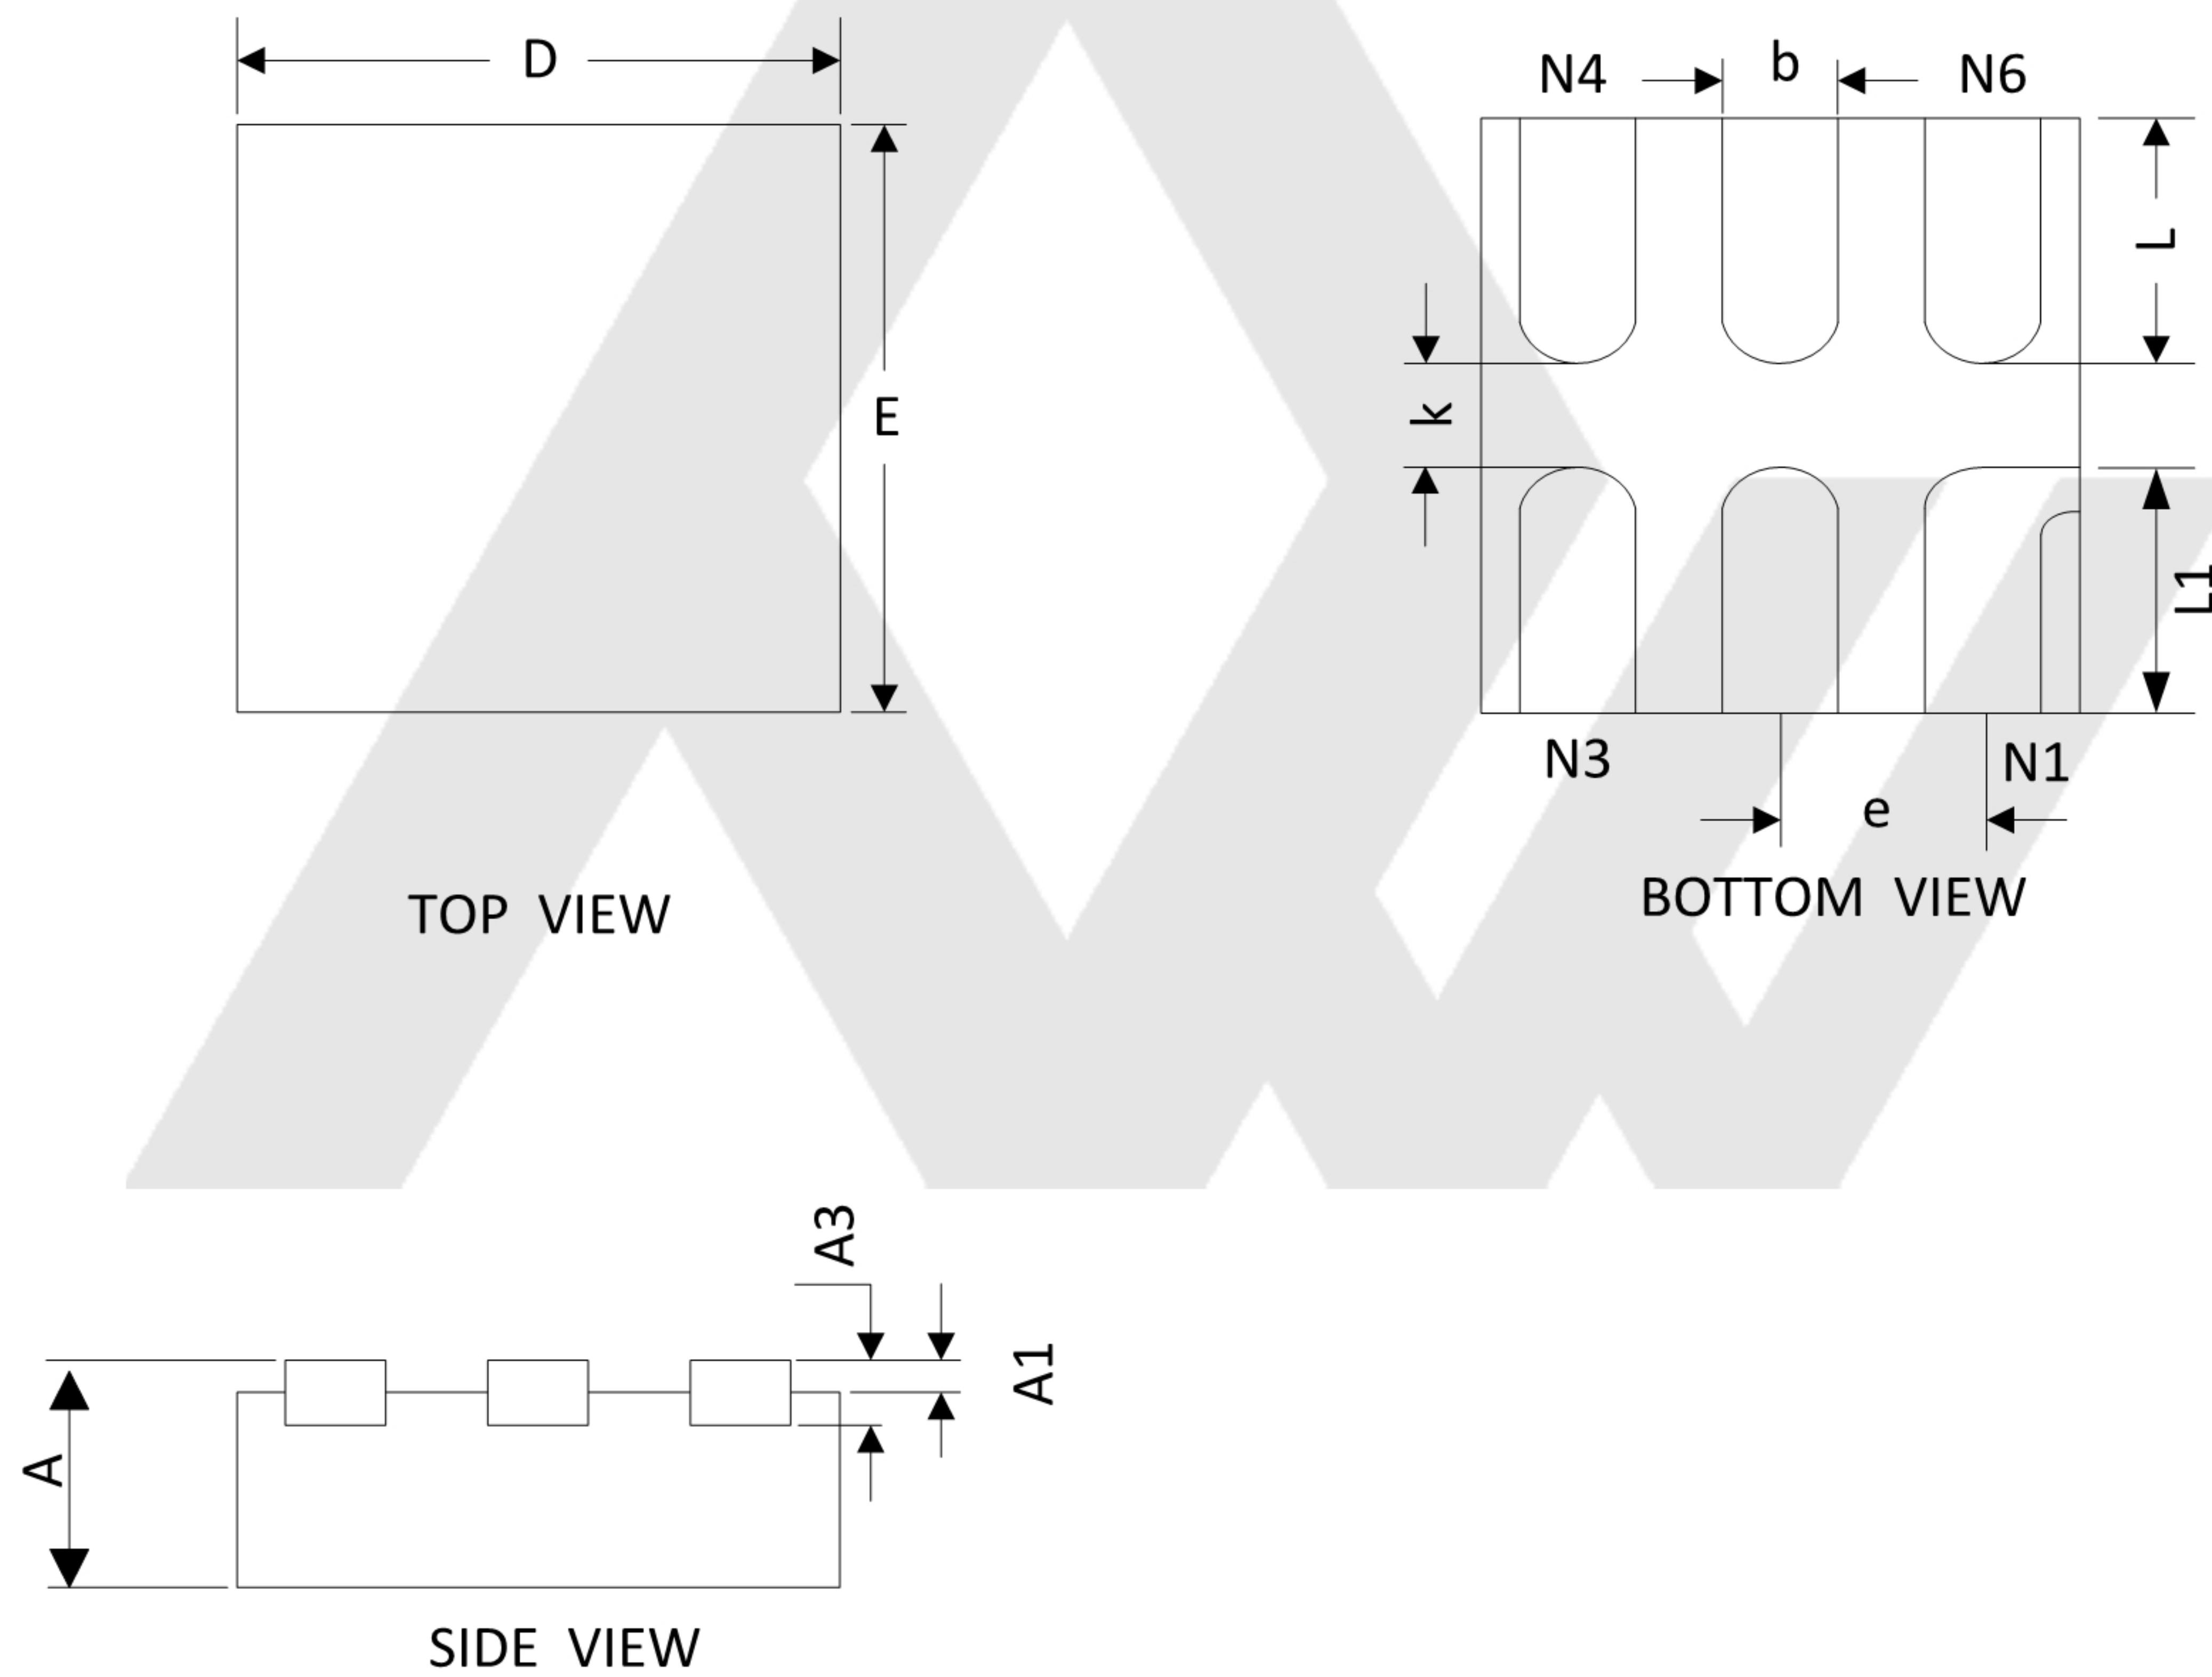

Symbol	Millimeter			Symbol	Inches		
	MIN	NOM	MAX		MIN	NOM	MAX
A	0.320	-	0.400	A	0.013	-	0.016
A1	0.000	0.020	0.050	A1	0.000	0.001	0.002
A3	0.100REF			A3	0.004REF		
D	0.950	1.000	1.050	D	0.037	0.039	0.041
E	0.950	1.000	1.050	E	0.037	0.039	0.041
K	0.150MIN			K	0.006MIN		
b	0.120	0.175	0.230	b	0.005	0.007	0.009
e	0.350TYP			e	0.014TYP		
L	0.350	0.400	0.450	L	0.014	0.016	0.018
L1	0.350	0.400	0.450	L1	0.014	0.016	0.018



## IMPORTANT NOTICE

Wuxi PWChip Semi Technology CO., LTD (PW) reserves the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any products or services. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

PW assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using PW components.

PW products are not authorized for use in safety-critical applications (such as life support devices or systems) where a failure of the PW product would reasonably be expected to affect the safety or effectiveness of that devices or systems.

The information included herein is believed to be accurate and reliable. However, PW assumes no responsibility for its use; nor for any infringement of patents or other rights of third parties which may result from its use.